


## AMERICAN 18

|                                |                       |
|--------------------------------|-----------------------|
| Overall length .....           | 17' 7"                |
| Waterline length .....         | 16' 4"                |
| Beam .....                     | 76"                   |
| Draft minimum .....            | 9"                    |
| Draft maximum .....            | 54"                   |
| Sail area .....                | 165                   |
| Recom. max. H.P.* .....        | 6                     |
| Mast length .....              | 22' 6"                |
| Mast height** .....            | 25' 6"                |
| Mast weight .....              | 40                    |
| Boom length .....              | 7                     |
| Boom weight .....              | 12                    |
| C/B material .....             | FG                    |
| C/B weight (approx.) .....     | 75                    |
| Rudder type .....              | Kick-up               |
| Rudder material .....          | FG                    |
| Seating .....                  | 6                     |
| Sailing displacement*** .....  | 1000                  |
| Minimum trailering weight ..   | 700                   |
| Complete hull weight only .... | 650                   |
| Safety features .....          | SR, SB, positive foam |

### Rig Measurements

|   |      |
|---|------|
| E | 9.75 |
| J | 5.75 |
| P | 20.0 |
| I | 16.5 |

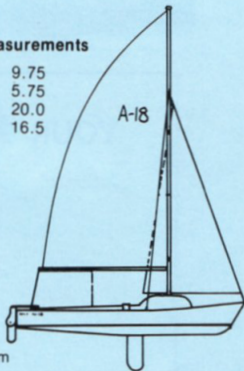

SB = Self-bailing

C/B = Centerboard SR = Self rescuing FG = Fiberglass AL = Aluminum

\*Long shaft model \*\*Above waterline (approx.) \*\*\*Boat with 2 people at 150 lbs. each.