

265



#### RIG DIMENSIONS


I .....	31.33'
J .....	10.07'
P .....	30.51'
E .....	10.82'
Sail area (main & 100% jib) .....	330 sq. ft. approx.

#### SPECIFICATIONS


L.O.A .....	26'5"
L.W.L .....	24'2"
Beam .....	9'5"
Draft .....	4'2"
Displacement .....	4,800 lbs. approx.
Ballast .....	1,450 lbs. approx.

# BENETEAU

## DECK LAYOUT

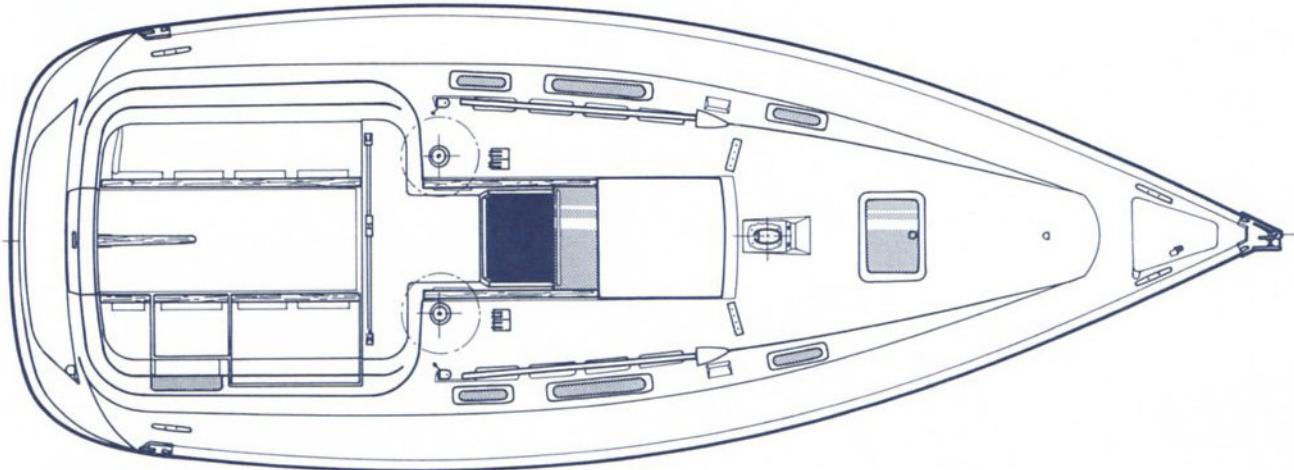

## INTERIOR LAYOUT

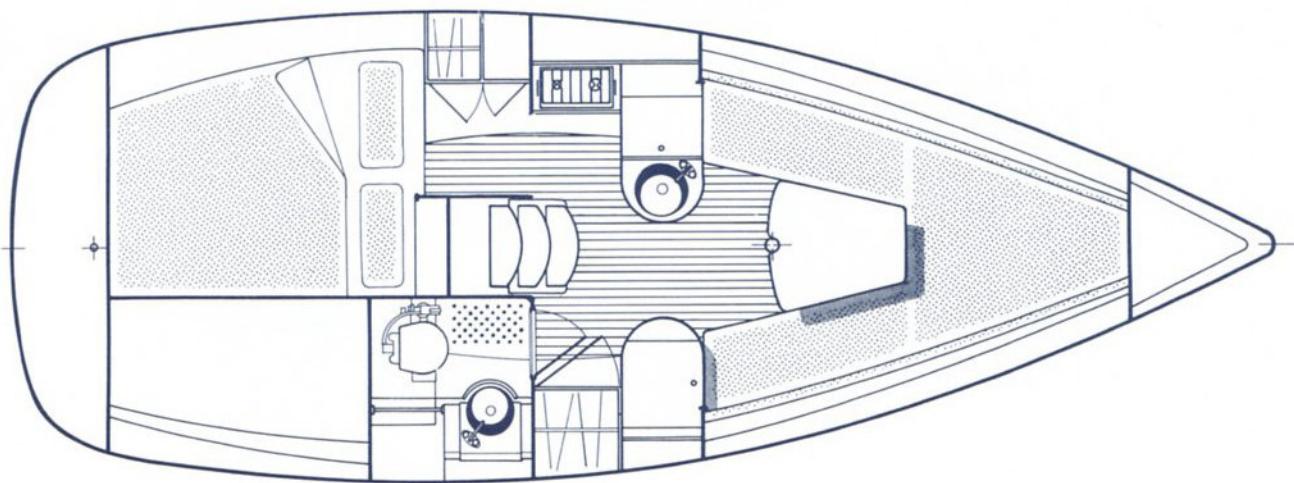

The manufacturer reserves the right to change price and specifications without notice

# FIRST 265

Includes all standard equipment listed below, F.O.B. Marion, S.C.

## DECK HARDWARE

Stemhead fitting, anodized aluminum with anchor roller and built in fairleads with rollers  
Self bailing anchor locker with pull ring handle  
Anodized aluminum toe rails  
Fairleads with rollers at aft end of toe rails  
Stainless steel pulpit with bi-color navigation light  
Stainless steel stern pulpit  
Stainless steel stanchions, 17.75" high  
Vinyl covered lifelines  
(4) mooring cleats  
Cockpit seats with teak toe rail/hand hold  
Self bailing cockpit with transom gate opening to swim platform  
One full depth sail locker with shelf  
One small top opening storage compartment aft of sail locker  
One winch handle pouch  
Teak tiller with extension  
One flush mounted Lewmar hatch 18" x 12"  
Six opening ports Lewmar 12" x 5"  
Two opening ports Lewmar 20" x 5"  
Tinted, sliding companion way hatch  
Varnished companionway drop boards  
Patented genoa tracks with cars, incorporated into cabin top handrails  
Genoa turning blocks with stoppers  
Two 16CST (or equal) genoa winches  
Three Spinlock stoppers for halyards etc.  
Two sets of four part deck organizers to feed lines aft to cockpit  
One deck fitting for spinnaker pole downhaul  
Adjustable mainsheet traveller with cleats  
Adjustable backstay tensioner  
Patented chain plate anchoring system  
Transom navigation light  
Fuel filler deck fitting  
Water filler deck fitting

## SPARS AND RIGGING

7/8ths Z-diffusion anodized mast and boom  
Single set of spreaders  
One reef line led to cockpit  
Internal halyards, outhaul and reef lines  
Anchor light  
Stainless steel standing rigging

## RUNNING RIGGING

Main and genoa halyards, (internal) boom topping lift, boom vang, main and genoa sheets, reefing lines led to cockpit

## SAILS

Mainsail with 2 reefs and battens  
100% Jib with bag

## INTERIOR ACCOMMODATION

Varnished cherry interior

## Companionway

Fiberglass molded steps with non skid  
Two grabrails  
Altuglass sliding hatch  
Removable lower companionway steps for engine access (inboard version)

## Aft cabin to port

Double berth  
Shelf alongside hull  
Hanging locker and shelves  
Storage under berth  
Three opening ports  
Two halogen lights with switches  
Engine and stuffing box access (inboard version)  
Curtain dividing cabin from salon

## Head compartment starboard

One piece head compartment molding in white fiberglass  
USCG approved head with holding tank in sail locker and three way valve  
Storage compartment  
Wash basin  
Pressurized cold water (hot water optional)  
Mirror  
Opening port 12" by 5"  
Light with switch  
Open hanging locker for foul weather gear

## Galley

Laminated working surface  
Round sink  
Cold pressurized water (hot optional)  
Storage under galley sink with trash can  
Fiberglass insulated ice box compartment (1.75 cubic foot)  
Gimballed alcohol non pressurized stove  
Crash bar on stove  
Storage under stove compartment  
Opening port

Stowage for utensils, plates, etc.

Hand rail under deck

Dust bin in sole

Halogen lamp

Rotomolded water tank 16.25 gallon capacity

## Navigation Station

Chart table  
Position for navigation instruments and radio  
Six function 12 volt control panel  
Hand rail under deck  
Hanging locker  
Opening port 20" x 5"  
Halogen light

## Salon

Salon table, drops to form double berth  
Two, opposing settees  
Molded headliner  
Mast wire access  
Opening hatch 18" x 12"  
Two opening ports 12" x 5"  
Halogen light

## Standard outboard version

Built in fuel tank - 7.5 gal. approx. with delivery pipe to transom  
Outboard bracket

## Option inboard version

Engine - Volvo 2001  
Fuel tank (diesel) - 7.5 gal. approx.  
Water/fuel separator  
Engine control panel in cockpit with plexiglass cover  
Two bladed propellor  
Engine compartment insulation with egg shell foam  
No drip stuffing box  
Composite P-bracket shaft support

## Electrical

1 x 60-amp battery  
Manual bilge pump  
12 volt pump for combination bilge, ice box and shower evacuation

## Option inboard version

Shore power with outlet in galley and head  
110 V. hot water heater

## MISCELLANEOUS

One winch handle  
Owner's manual  
Beneteau briefcase  
Spares kit

**10 YEAR LIMITED HULL AND DECK WARRANTY**