

BENETEAU

DATA SHEET

F I R S T

32^S5



RIG DIMENSIONS

I	38.39'
J	9.68'
P	38.88'
E	13.78'
Sail area (with max. genoa)	593 sq. ft.

SPECIFICATIONS

L.O.A.	32'6"
L.W.L.	27'10"
Beam	10'10"
Draft Deep	6'
Wing	4'5"
Displacement	9,260 lbs. approx.
Ballast	2,980 lbs. approx.

BENETEAU

FIRST 32^S5

Includes all standard equipment listed below, F.O.B. Marion, S.C.

DECK FITTINGS

Pulpit with navigation lights
Opening stern pulpit with horse-shoe buoyholder
Stainless steel tapered stanchions, double lifelines
Anodized aluminum toerail, fairlead with built-in rollers (patented)
Aluminum bow sternhead with two anchor rollers, and two fairleads
Self-bailing anchor well with mooring eye and integrated windlass support
Four mooring cleats
Two aft fairleads with built-in rollers (patented)
Two stainless steel grabrails
Two dispatching deck blocks with 6 sheaves
Twelve Spinlock halyard jammers
Two Lewmar 24 winches for halyards, reef lines
Harken® main sheet blocks
Harken® boom vang blocks
Two genoa tracks with adjustable car
Two genoa sheet lead blocks with jammers
Two Lewmar 40 cst winches for genoa sheet
Two cleats for genoa sheet
Three pad eyes for spinnaker sheet and pole down haul
Backstay adjustment on both sides by 12:1 purchase
One winch handle holder
One open locker with aluminum frames
One sail locker
One gas bottle locker
Teak slatted cockpit
Bathing platform with swim ladder locker and swim ladder
Wheel steering with compass and brake
Cabin top traveller
Two boarding gates

RIGGING

Anodized mast (tapered) and boom
Two sets of spreaders
Standing rigging: rod discontinuous, Isomat double groove headfoil. Changeable into roller furler with drum integrated in chain locker
Running rigging: 1 main halyard, 1 genoa halyard, 1 boom topping lift, 1 boom vang, 1 main sheet, 2 genoa sheets, 3 reefing lines, 1 outhaul line

SAILS

Fully battened Dacron main with 2 reefs
Norlamin® 120% Genoa

INSIDE ACCOMMODATIONS

Choice of mahogany or teak interior

Forward cabin

Double bed
Lockers alongside the hull
2 hanging lockers
Storage under berth
Opening deck hatch with ventilation position and blind
2 halogen lights

Salon

2 berths with mattresses and back rest
Rest water tank (capacity 40 gallons approx.)
Table with fiddle and bottle rack
Overhead lockers on starboard and portside
Lockers and bar behind the salon seats
Opening deck hatch with roller blind
4 opening portholes in coachhouse coaming
Grabrail with integrated blinds
Halogen lights

Galley

Marble working space with aluminum fiddles (mahogany model)
2 round s/s sinks
Hot and cold pressurized water with double faucet
Stowing under sinks with plastic basket and garbage box
Insulated icebox with 2 baskets and sliding tray over
Gimbaled 2 burner propane stove with oven
Gas bottle in the cockpit
Crashbar in front of oven
Stowing baskets
Opening porthole above stove
Halogen lights
Grabrail with integrated blind
Seawater foot pump and icebox drain

Navigation Station

Chart table with fiddles
Bookshelf — lockers
Panel for navigation instruments
Electronic panel with 12 functions, hinged for easy access to wiring
Chart table seat
Opening porthole above table
Grabrail with integrated blind
Red night light

Companionway

15 mm altuglass sliding hatch
2 part door
Aluminum door frame

Molded step with nonskid
Removable steps for access to engine

Aft Cabin

Double bed
Lockers alongside the hull
Hanging locker
Storage under berth
2 opening portholes
1 fixed porthole
2 halogen spotlights and 1 ceiling light
Inspection hatch for engine and stuffing box

Head Compartment

White bulkhead with water repellent coating
Lockers and drawers
USCG approved head with holding tank
Stainless steel wash basin with hot and cold pressurized water with double faucet
Hand shower
Locker with mirror
Grabrail and towel holder
Weather gear hanging locker
Shower tray
1 opening porthole
1 fixed porthole
1 ceiling light

ENGINE

Engine: Volvo 2002 with heat exchanger
Fuel tank 18.5 gallons approx.
Engine control panel, fuel gauge in cockpit protected by altuglass
2 blade propeller

ELECTRICAL

2 x 60-AMP batteries
110 V Shorepower with 20-AMP Sentry battery charger


VERSIONS

Wing Keel
Lead Deep Keel

MISCELLANEOUS

2 winch handles
Teak flag pole
Owner's manual
Beneteau brief case
Spare parts kit

INTERIOR LAYOUT

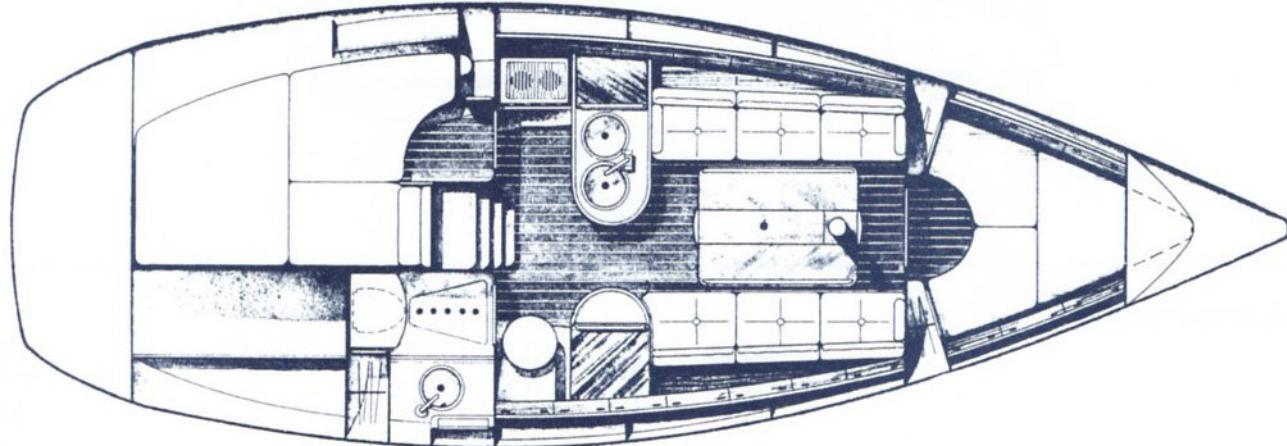

The manufacturer reserves the right to change price and specifications without notice



BENETEAU, INC. 8720 RED OAK BOULEVARD SUITE 102 CHARLOTTE, NC 28217 (704) 527-8244