


BENETEAU

DATA SHEET

F I R S T

38^S5

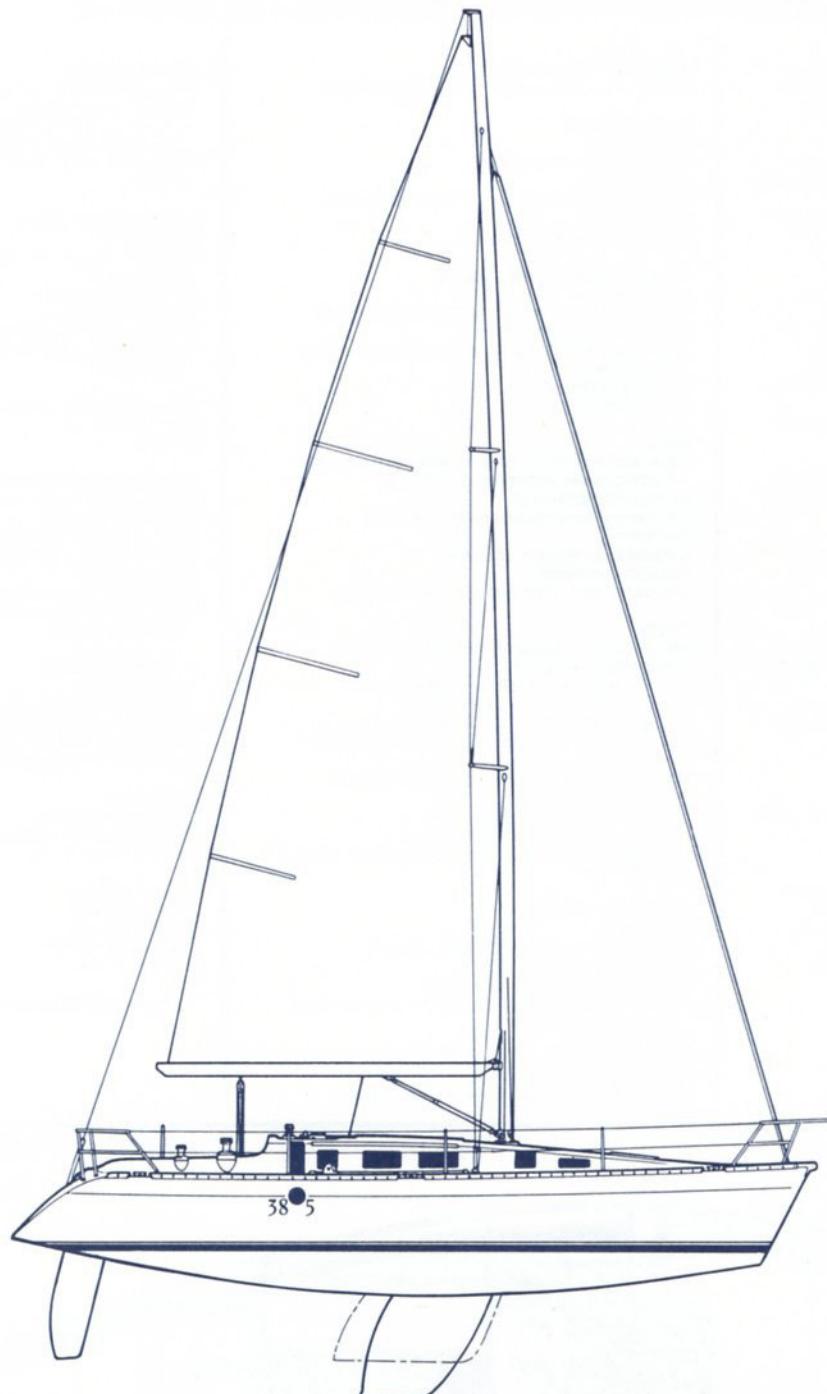

RIG DIMENSIONS

I	47.14'
J	12.79'
P	47.90'
E	15.41'
Sail area (with 100% Δ)	685 sq. ft.

SPECIFICATIONS

L.O.A	38'3"
L.W.L.	31'4"
Beam	12'4"
Draft Deep	6'11"
Shoal	5'2"
Displacement	14,520 lbs. approx.

Includes all standard equipment listed below, F.O.B. Marion, S.C.

DECK FITTINGS

Anodized aluminum stemhead fitting with anchor roller and roller fairleads
 Aluminum toerail
 Six mooring cleats integrated on toerail
 S/S pulpit with navigation lights
 S/S stern rail with horse-shoe support and teak flagpole
 S/S profiled stanchions 24" high
 Double S/S lifeline with opening gates on starboard and port
 Self bailing anchor locker with cleats
 Mechanical windlass
 Two aluminum handrails on coachroof
 Halyards and reefing lines led aft to cockpit
 GRP halyard cover
 Twelve jammers for halyards and reefing lines
 2x Lewmar 30 cst for halyards and reefing lines
 One main sheet traveller with car on the coachroof (optional installation in cockpit)
 Two genoa sheet tracks with car—adjustable under tension
 Two genoa sheet turning blocks
 2x Lewmar 46 C/ST genoa sheet winches with cleats
 Leather covered Goiot steering wheel with compass (47" diameter)
 Two flush chainplates for shrouds
 Six pad eyes for spinnaker downhaul topping line and sheets
 One steering quadrant access locker
 Two lockers for sails and liferaft
 One locker for gas bottle
 Engine control recessed in cockpit coaming
 Teak slatted cockpit seats with location for repeaters
 Teak grating in cockpit
 Double-effect manual bilge pump
 S/S step on transom with backstay chainplate and navigation light
 Aluminum diesel fuel and water fillers

TRANSOM

Bathing platform with built in swim ladder locker and swim ladder

RIGGING

7/8 tapered mast with anodized boom (Sparcraft)
 Two sets of spreaders
 Running rigging: 1 main halyard, 1 genoa halyard, 1 boom topping lift, boom vang, main sheet, 2 genoa sheets, 3 reefing lines, 1 outhaul line
 Discontinuous rod rigging
 Isofurl double groove headstay/furler
 Furling drum recessed in anchor locker

SAILS

Mainsail with 2 reefs
 135% furling genoa

INSIDE ACCOMMODATIONS

Choice of varnished mahogany or teak interior

Forward Cabin

Double berth
 Lockers alongside the hull
 Hanging locker
 Opening deck hatch 20" x 20" with roller blind
 Opening port
 Ceiling lights—spotlights

Forward Head Compartment

White GRP liner
 USCG approved marine head with holding tank
 Hanging locker with mirror
 Wash basin with hot and cold pressurized water
 Hand shower
 Opening port hole
 Fluorescent lights

Salon

Table with aluminum footing and leaf supports, folding leaves and removable fiddles
 Lockers alongside hull
 Six opening hatches on coach roof sides
 Two settees
 Grab rail with integrated blinds
 Halogen spotlights
 Mahogany floor board with nonskid rubber

Galley

Marble counter top with aluminum fiddles (mahogany version)
 Two round S/S sinks 11 7/8" diameter
 Hot and cold pressurized water
 Stowage under sinks, basket, dustbin
 12 volt electric fridge (4.0 cu. feet) with baskets for stowage
 Three burner gimballed S/S stove with oven
 Opening port hole
 Grab rail with integrated blind
 Halogen spotlight, fluorescent light
 Two rigid fresh water tanks (approx. 45 gal. each)
 Hot water tank

Navigation Station

Chart table
 Marble counter top (mahogany version)
 Bookshelf—locker
 Panel for navigation instruments
 Electronic switch panel, hinged for easy access to wiring (16 functions)
 Chart table seat
 Opening port hole
 Grab rail with integrated blind
 Halogen spotlight—red light for navigation

Companionway

Sliding hatch (5 1/8" altuglass)
 Two part hatchboards
 Aluminum frame for hatchboards
 Curved steps with nonskid rubber
 Removable lower steps for access to engine
 Grab rails

Aft Owner Stateroom

Double berth
 Lockers alongside the hull
 Hanging locker
 Storage under berth
 Opening portholes
 Three halogen spotlights
 Engine and stuffing box access
 Fixed skylights

Forward of Port Aft Cabin

Wet hanging locker
 Storage

Aft Head Compartment

White bulkhead with water repellent protection coating
 Locker with mirror
 Grab rail—S/S towel holder
 S/S sink with hot and cold pressurized water—shower
 Fixed skylights
 Opening portholes on coaming
 USCG approved marine head with holding tank
 Two ceiling lights

ENGINE EQUIPMENT

Insulating foam
 Volvo 2003 Turbo (43 HP)
 Single lever engine controls
 S/S fuel tank (31.7 gal. approx.)
 Two blade fixed propeller

ELECTRICAL

2 x 60 amp batteries
 110v shorepower with battery charger
 Electrical bilge pump


MISCELLANEOUS

2 winch handles
 Owner's manual
 Beneteau brief case
 Spare parts kit

10 YEAR LIMITED HULL AND DECK WARRANTY

The manufacturer reserves the right to change price and specifications without notice

INTERIOR LAYOUT

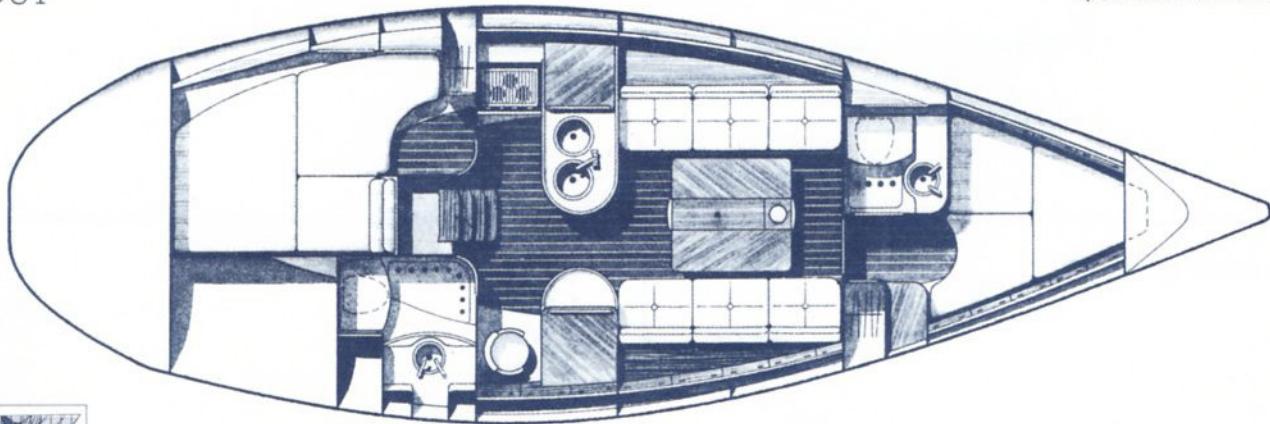

BENETEAU, INC. 8720 RED OAK BOULEVARD SUITE 102 CHARLOTTE, NC 28217 (704) 527-8244