



STANDARD EQUIPMENT	25	22	20	M
PLEASURE GROUP				
All hardware non-corrosive or stainless steel	X	X	X	X
Built-in insulated ice box	X	X	X	X
Forward cabin door	X	X	X	X
Carpet	X	X	X	X
Dinette table	X	X	X	X
Forward Hatch	X	X	X	X
Galley Unit (stove area, ss sink, pump, water tank, insulated ice box and storage compartment)	X	X	X	X
Hanging locker	X	X	X	X
Kick-up rudder	X	X	X	X
Mainsheet traveler	X	X	X	X
Mooring and trailing bow eye	X	X	X	X
O/B gas tanks' storage locker	X	X	X	X
Storage locker	X	X	X	X
Storage shelves	X	X	X	X
Tabernacle	X	X	X	X
Transom designed for outboard	X	X	X	X
2 year warranty	X	X	X	X
Vinyl gunwale guard	X	X	X	X
ACCENT GROUP				
All colors molded in	X	X	X	X
All exterior wood is teak	X	X	X	X
Fiberglass centerboard trunk cap	X	X	X	X
Gold anodized mast and boom	X	X	X	X
Gold racing stripe	X	X	X	X
Molded in waterline stripe	X	X	X	X
Varnished Philippine mahogany trim (Inter.)	X	X	X	X
SAFETY GROUP				
Automatic cockpit drain	X	X	X	X
Mast is sealed for flotation	X	X	X	X
Non-skid deck and seats	X	X	X	X
Positive foam flotation	X	X	X	X
Roller reefing	X	X	X	X
Self-bailing cockpit	X	X	X	X
Self-righting	X	X	X	X
Stainless steel rigging with swaged terminals	X	X	X	X
Thru-bolted mooring cleats	X	X	X	X
Thru-bolted mooring and stern cleats	X	X	X	X
HIGH PERFORMANCE GROUP				
Adjustable jib sheet leads	X	X	X	X
Best dacron running rigging	X	X	X	X
Full masthead rig	X	X	X	X
Inside lead ballast	X	X	X	X
Quick release cam cleat for main sheet	X	X	X	X
Quick release cam cleats for main & jib sheets	X	X	X	X
Stainless steel rigging with swaged terminals	X	X	X	X
Stainless steel wire halyards with dacron tail	X	X	X	X


O'DAY 25

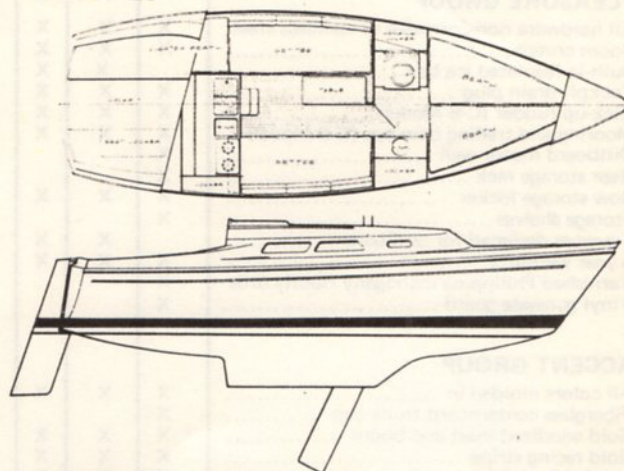


O'DAY 22

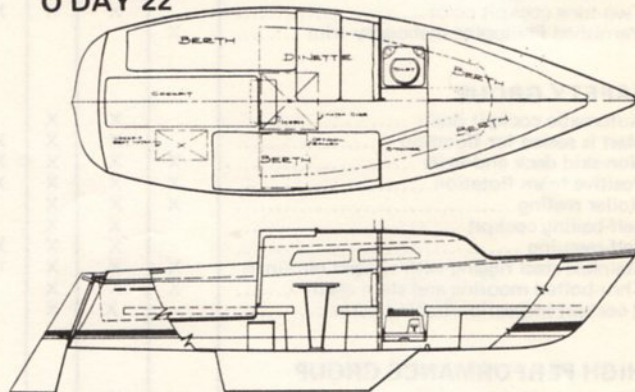

O'DAY 20

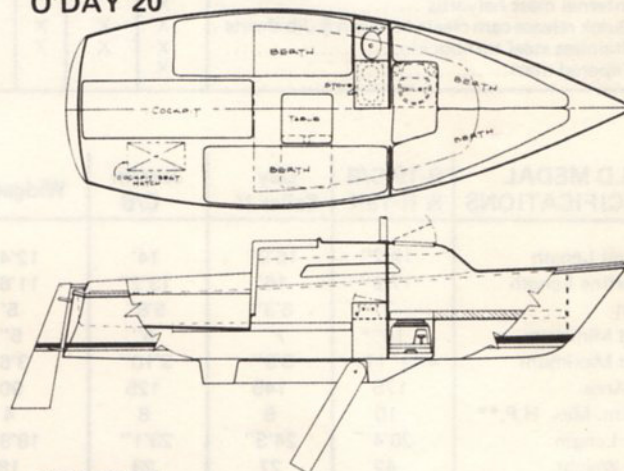

MARINER

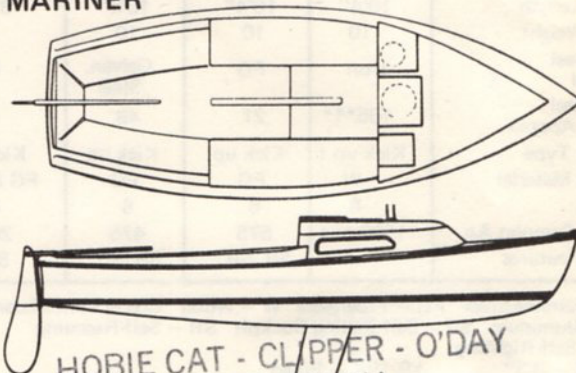

GOLD MEDAL SPECIFICATIONS	O'Day 25	O'Day 22	O'Day 20	Mariner C/B
Overall Length	24'10"	21'8"	19'8"	19'2"
Waterline Length	21'	19'	17'4"	17'9"
Beam	8'	7'2"	7'	7'
Draft Minimum	2'3"	1'11"	14"	10"
Draft Maximum	6'	1'11"	4'5"	4'11"
Sail Area	270	196	174	185
Max. Recom. H.P.**	12	12	12	10
Mast Length	29'	22'9"	22'9"	24'8"
Mast Weight	60	42	42	40
Boom Length	9'	8'6"	8'6"	10'4"
Boom Weight	10	10	10	10
C/B - Keel Material	Lead	Lead	Lead	Iron & Lead
C/B - Keel Weight Approx.	1500	600	400	165 & 200 ballast
Rudder Type	Fixed	Fixed	Fixed	Kick up
Rudder Material	FG	FG	FG	W
Seating	6	6	6	6-8
Weight Complete Ap.	3600	1800	1600	1305
Safety Features	SB, SRT	SB, SRT	SB, SRT	SB, SRT


SS — Stainless Steel FG — Fiberglass W — Wood C/B — Centerboard
 AL — Aluminum SB — Self-Bailing Cockpit SR — Self-Rescuing
 SRT — Self-Righting
 **Long Shaft Model

All prices and specifications are subject to change without notice. Prices F.O.B. Fall River.


HOBIE CAT - CLIPPER - O'DAY
 LONG BEACH
 6400 E. Pacific Coast Hwy.
 Long Beach, Calif. 90803
 213/597-7755

STANDARD EQUIPMENT	R19	D.S.	J	W
PLEASURE GROUP				
All hardware non-corrosive or stainless steel	X	X	X	X
Boom crutch	X	X	X	
Built-in insulated ice box		X	X	
Cockpit drain plug	X	X	X	X
Kick-up rudder (C-B Model)	X	X	X	X
Mooring and trailing bow eye (C-B Model)	X	X	X	X
Outboard motor well	X			
Rear storage rack	X			
Bow storage locker	X	X	X	
Storage shelves	X			
Transom designed for outboard		X	X	X
2 year warranty	X	X	X	X
Varnished Philippine mahogany floorboards	X			
Vinyl gunwale guard	X			
ACCENT GROUP				
All colors molded in	X	X	X	X
Fiberglass centerboard trunk cap	X		X	X
Gold anodized mast and boom	X	X	X	X
Gold racing stripe	X	X	X	X
Molded in waterline stripe	X	X	X	X
Two-tone cockpit color		X	X	X
Varnished Philippine mahogany trim	X			
SAFETY GROUP				
Automatic cockpit drain		X	X	
Mast is sealed for flotation		X	X	X
Non-skid deck and seats	X	X	X	X
Positive foam flotation	X	X	X	X
Roller reefing	X	X	X	
Self-bailing cockpit		X	X	
Self-rescuing		X	X	X
Stainless steel rigging with swaged terminals	X	X	X	X
Thru-bolted mooring and stern cleats	X	X	X	
2 cockpit inspection/bailing ports		X	X	
HIGH PERFORMANCE GROUP				
Adjustable jib sheet leads	X	X	X	
Best dacron running rigging	X	X	X	X
Internal mast halyards	X			
Quick release cam cleats for main & Jib sheets	X	X	X	X
Stainless steel turnbuckles	X	X	X	X
Tapered mast	X			


RHODES 19

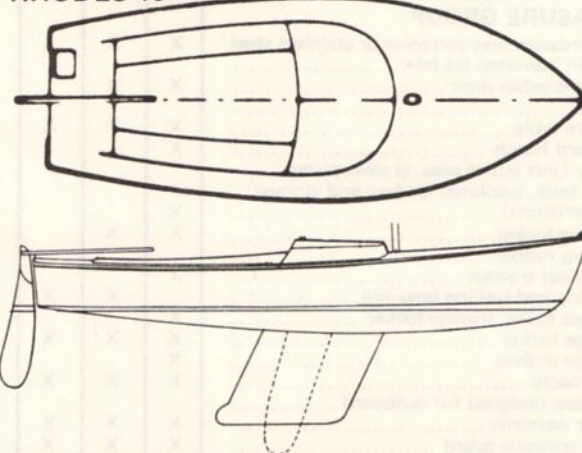


DAY SAILER

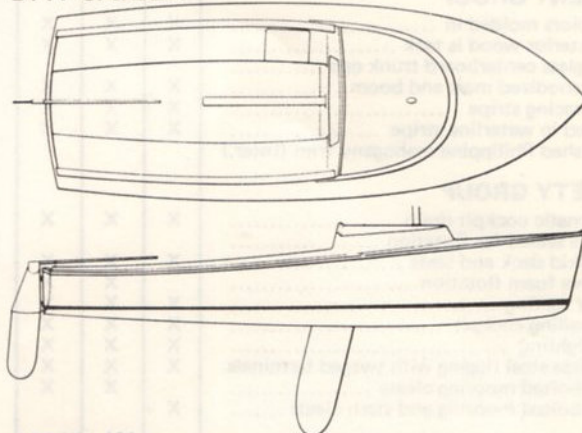

JAVELIN

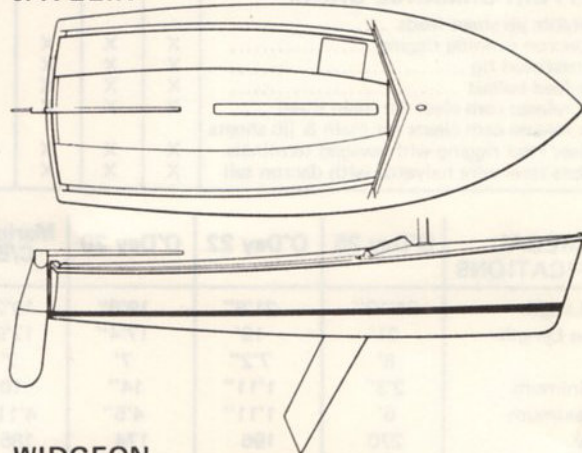

WIDGEON

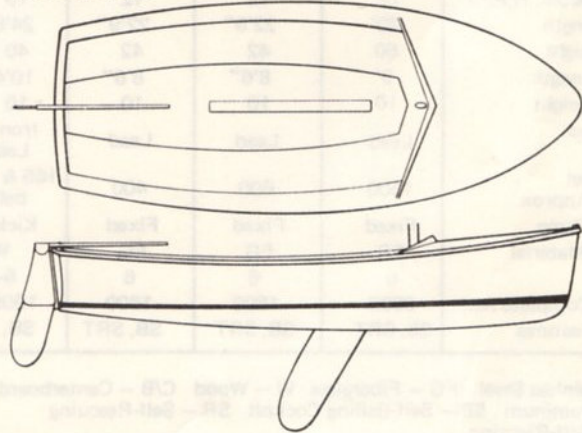

GOLD MEDAL SPECIFICATIONS	R-19 C/B & R-19K	Day Sailer II	Javelin C/B	Widgeon
Overall Length	19'2"	16'9"	14'	12'4"
Waterline Length	17'9"	16'	13'2"	11'6"
Beam	7'	6'3"	5'8"	5'
Draft Minimum	10"*	7"	6"	5"
Draft Maximum	4'11"††	3'9"	3'10"	3'6"
Sail Area	175	145	125	90
Recom. Max. H.P.**	10	8	8	4
Mast Length	28'4"	24'3"	23'1"	18'8"
Mast Weight	42	27	23	18
Boom Length	10'4"	10'4"	10'4"	8'4"
Boom Weight	10	10	10	5
C/B - Keel Material	Iron	FG	Galvan. Steel	FG
C/B - Keel Weight Approx.	165***	21	49	15
Rudder Type	Kick up †	Kick up	Kick up	Kick up
Rudder Material	W	FG	FG	FG & AL
Seating	6	6	6	4
Weight Complet Ap.	1030 †††	575	475	285
Safety Features	—	SB, SR	SB, SR	SR

SS — Stainless Steel FG — Fiberglass W — Wood C/B — Centerboard

AL — Aluminum SB — Self-Bailing Cockpit SR — Self-Rescuing

SRT — Self-Righting

*R-19K — 3'3" †R-19K — Fixed

**Long Shaft Model ††R-19K — 3'3"

***R-19K — 415 †††R-19K — 1355