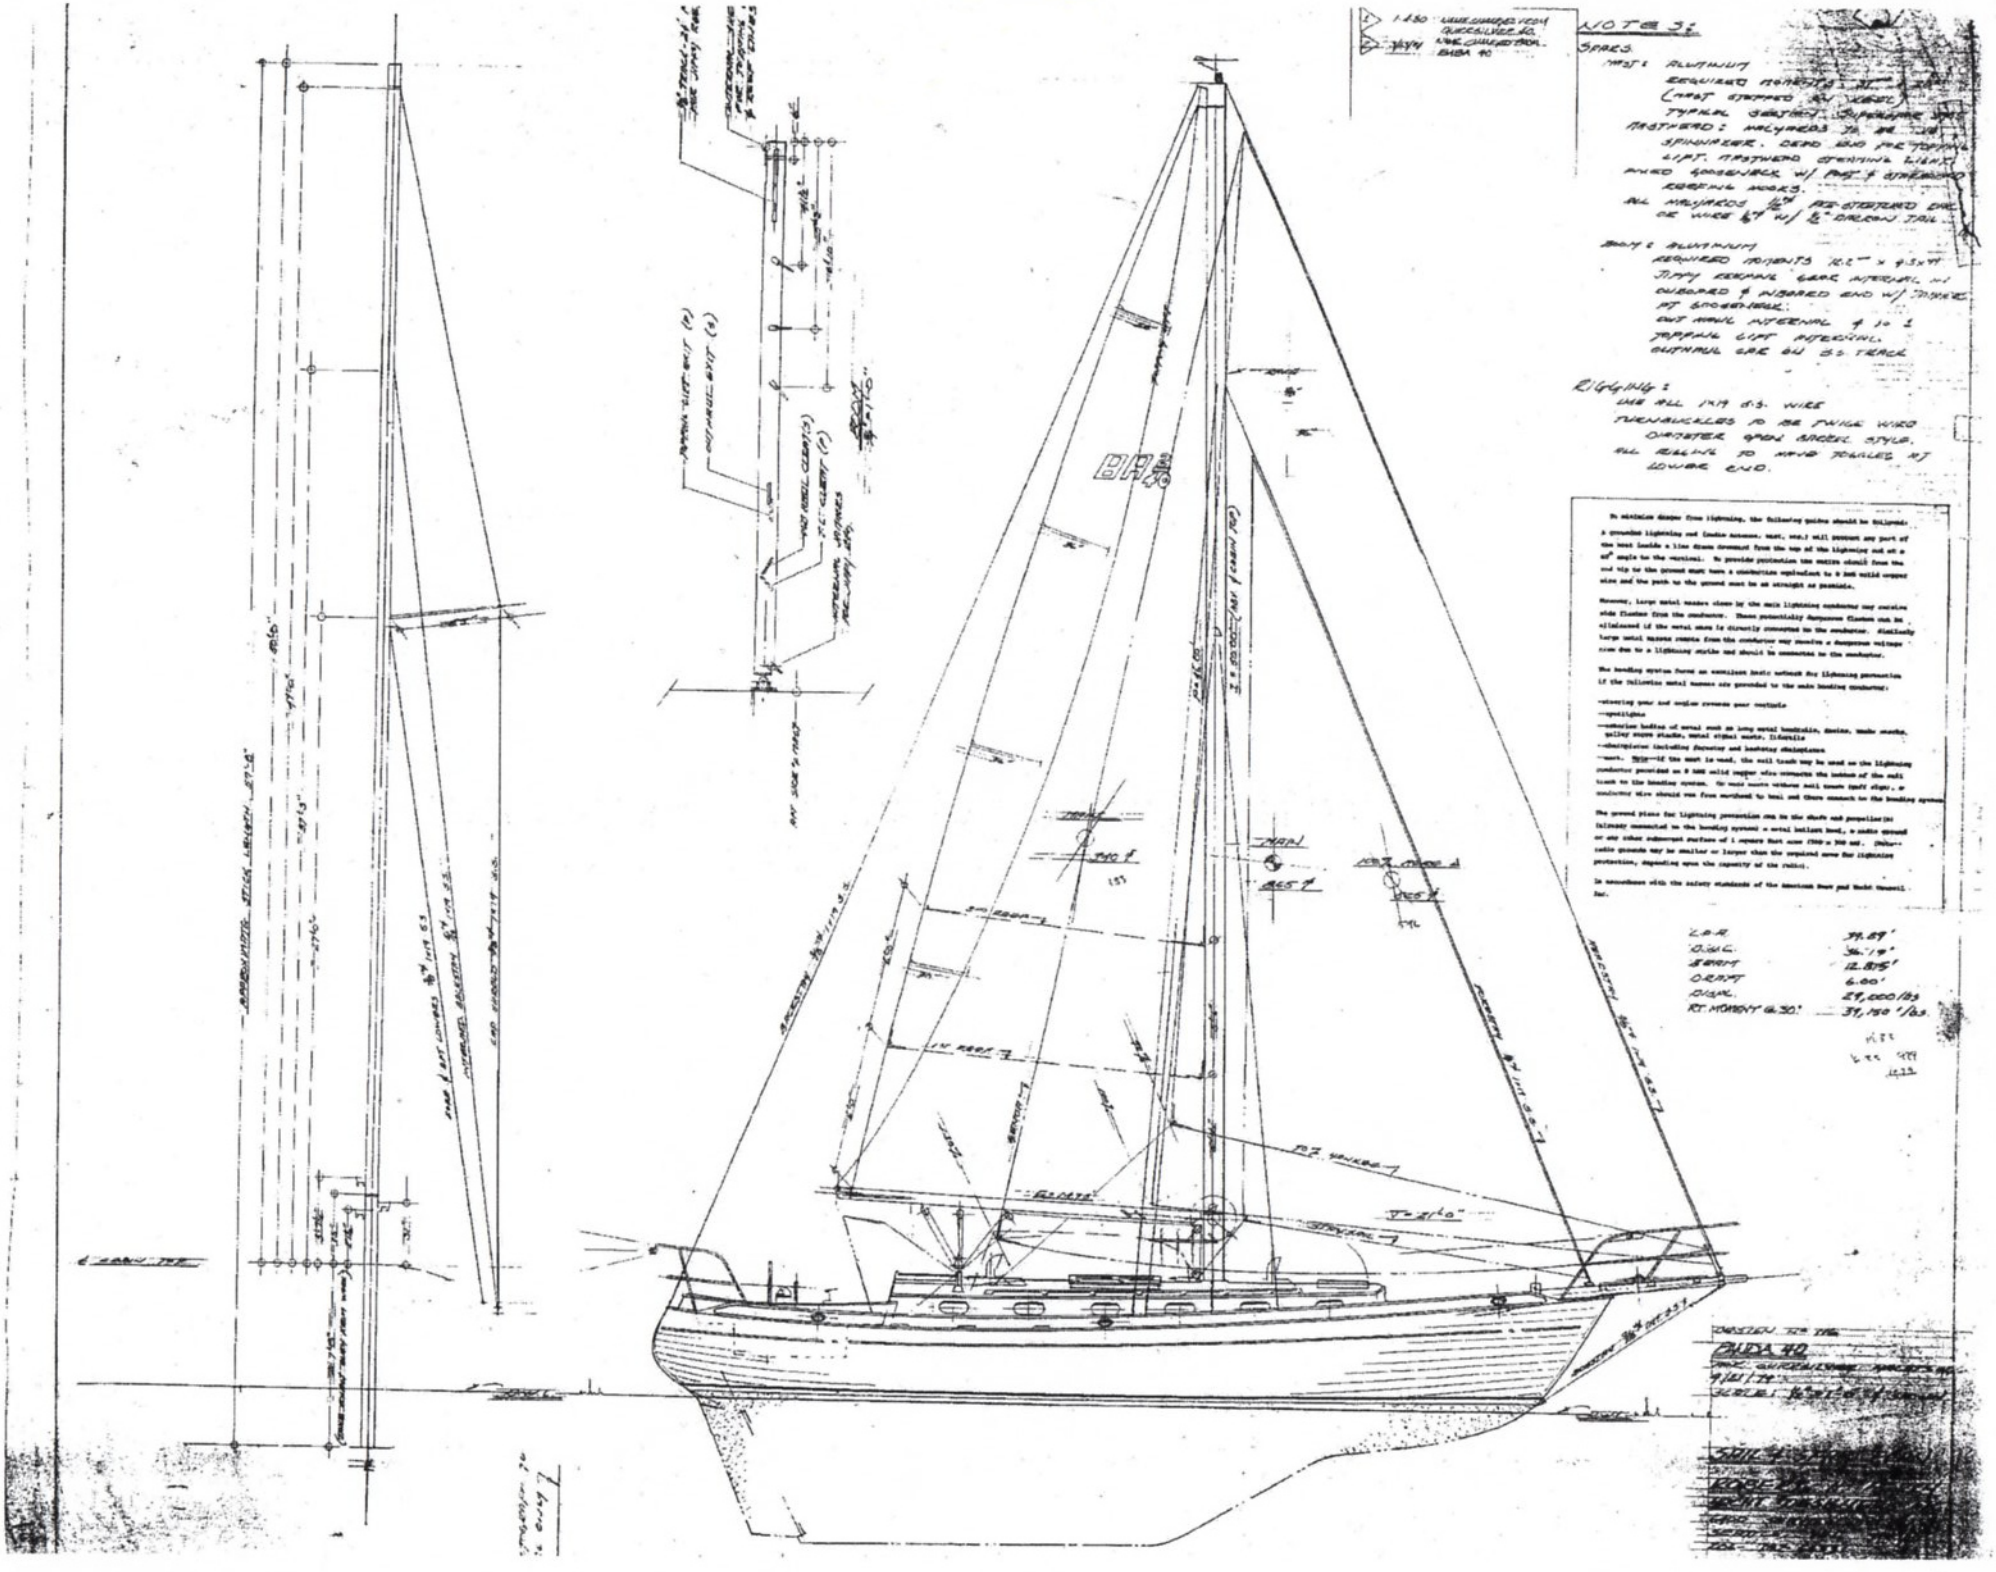
NOTE 3:
SPARS.
MAST: ALUMINUM
REQUIRED MOMENTS
TYPICAL SECTION
MASTHEAD: HALYARDS
SPINNAKER, DEAD END FOR TOPPING LIFT, MASTHEAD STEERING LIGHT
FIXED SPREADER W/ PAD & STRENGTHED
ROTATING HOOKS.
ALL HALYARDS
OR WIRE 6T W/ 1/2" DACRON TAIL
BOOM: ALUMINUM
REQUIRED MOMENTS
JIBBY REPAIR GAGE INTERNAL IN OUTBOARD & INBOARD END W/ TAPERS AT GOOSENECK.
OUT HAUL INTERNAL & TO 1
TOPPING LIFT INTERNAL
OUTHAUL GAGE ON S.S. TRACK
RIGGING:
USE ALL 1X19 S.S. WIRE
TURNBUCKLES TO BE TWICE WIRE DIAMETER OPEN BARREL STYLE.
ALL ROLLING TO HAVE TOGGLES AT LOWER END.
BIRDS
MAIN
L.O.A. 39.89'
D.W.L. 36.19'
BEAM 12.83'
DRAFT 6.00'
DISPL. 29,000 lbs
RT. MOMENT 6.30' 31,150 '/lbs.
DESIGN FOR THE
BUDA 40