
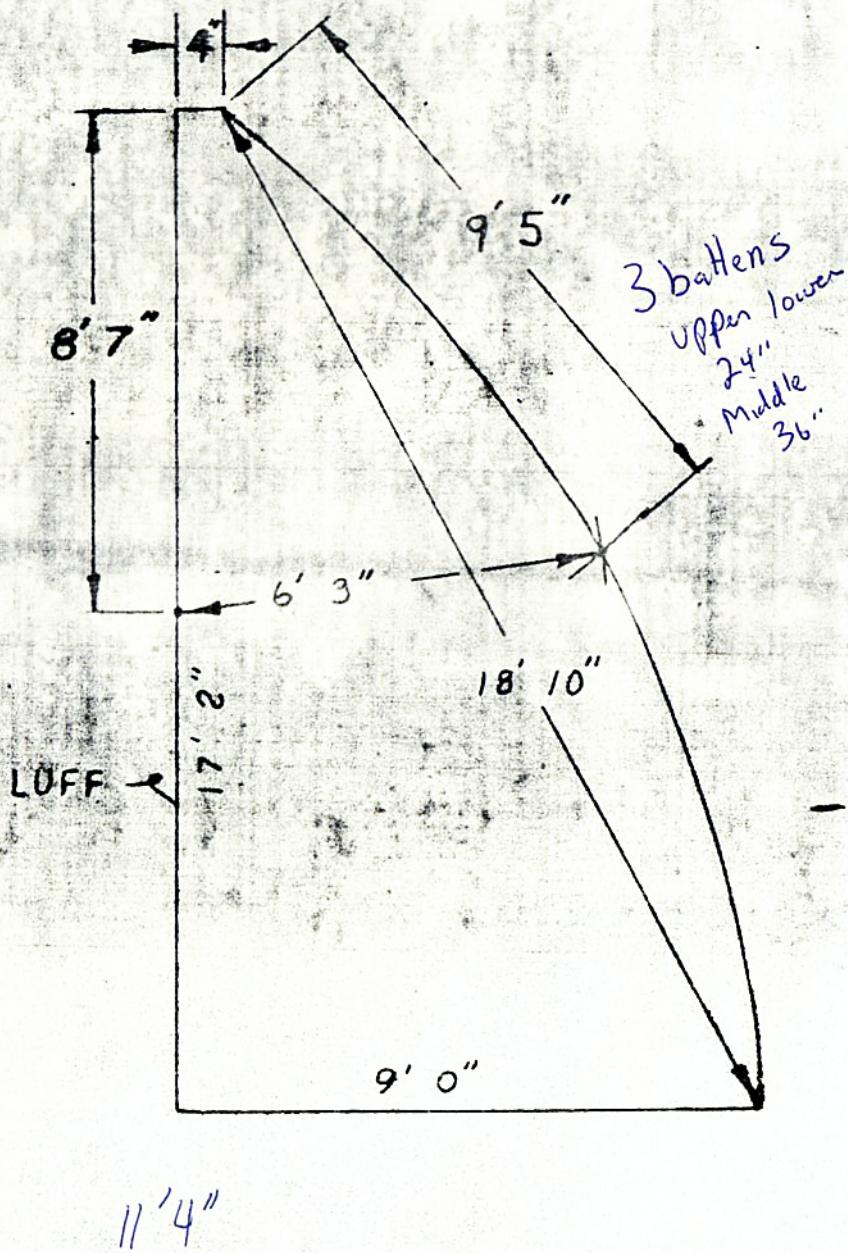


Rhodes Bantam

FOLD LINE

LEACH & LUFF

INTERSECTION
OF LEACH &
CLOTH WRAPPING

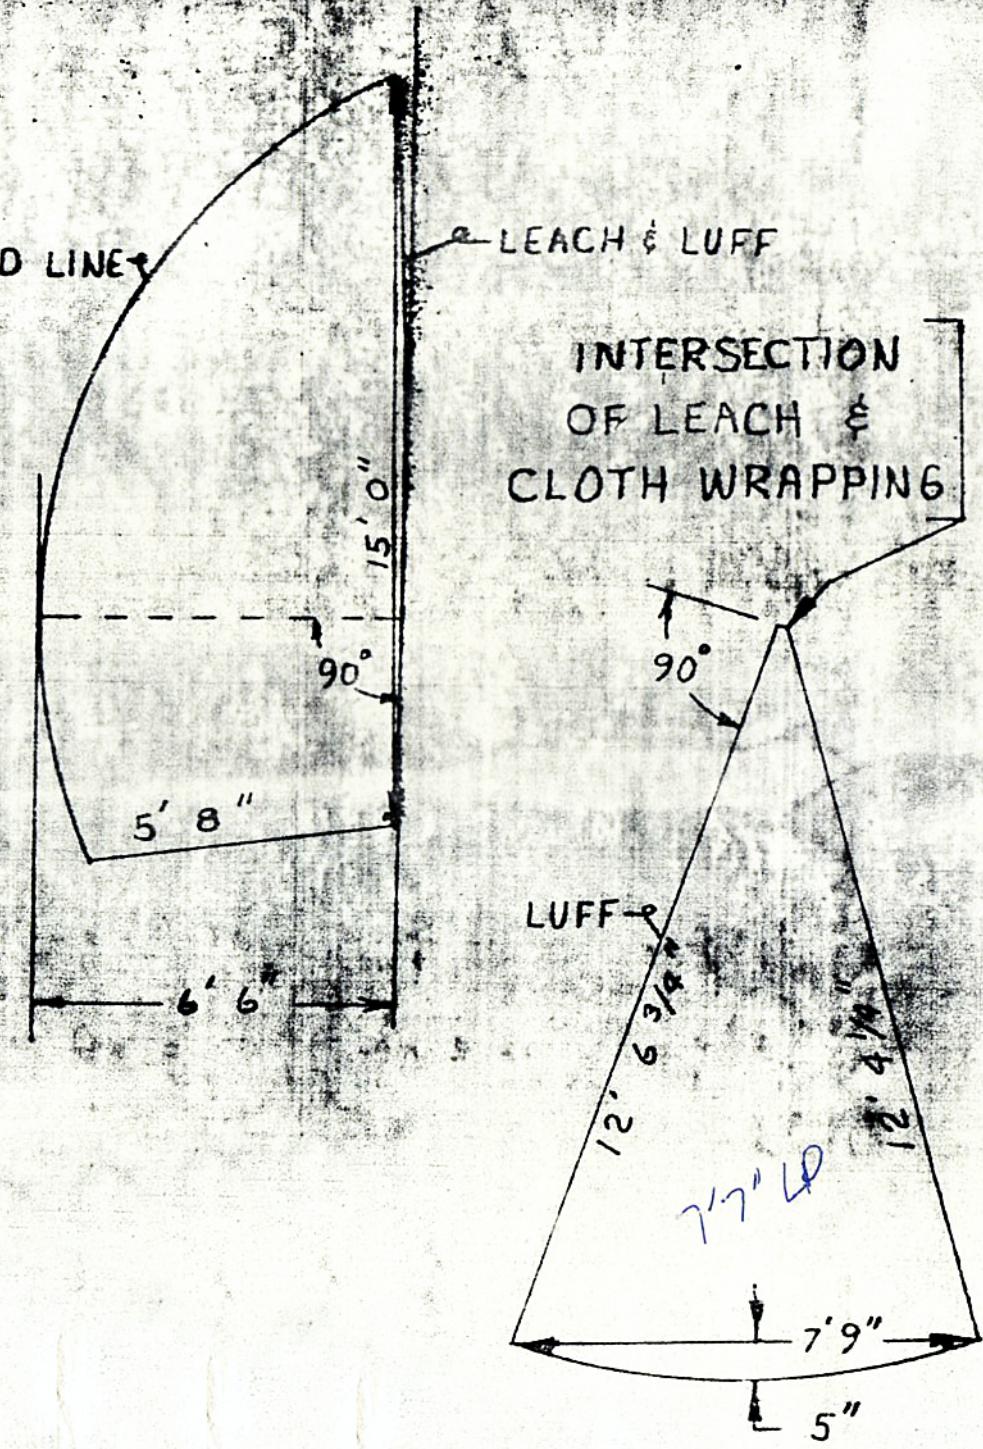

JIB MEASUREMENT PROCEDURE

1. Measure the luff by holding the head at the head mark and pulling the tack with 5 lbs. tension and checking at tack mark. If fitted with a cunningham, cloth must be tensioned to 5 lbs.
2. Measure the leach by holding the head at the head mark and checking the clew at the clew mark. (NO TENSION APPLIED)
3. Measure the foot by holding the tack at the tack mark and checking the clew at the clew mark. (NO TENSION APPLIED)
4. Measure the foot roach by holding the tack at the tack mark and the clew at the clew mark. NOTE: IF FOOT IS LESS THAN MAXIMUM, A FAIR CURVE MUST BE PROJECTED ALONG THE FOOT OF JIB SO IT INTERSECTS THE CLEW MARK. Now, smooth out wrinkles so roach lays flat and check that it falls within the limit mark.
5. Check for royalty tag.

SPINNAKER MEASUREMENT PROCEDURE

1. Fold the sail in half vertically and check the luff and leach by holding the head at the head mark and checking the clews at the clew mark. (NO TENSION APPLIED)
2. Check the $\frac{1}{2}$ foot measurement by holding the clews at the clew mark and checking the center seam at the $\frac{1}{2}$ foot mark.
3. Hold the head at the head mark and check the center seam at the foot.
4. Check $\frac{1}{2}$ mid-girth at the widest spot using the 6'6" mid girth marks.
5. Check for proper numbers on both sides of sail.
6. Check for royalty tag.

MAINSAIL MEASUREMENT PROCEDURE

1. Check width of the headboard using the 4" headboard marks.
2. Check the luff by placing the head at the head mark and checking the tack with 5 lbs. tension at the tack mark.
3. Check the foot by holding the tack at the tack mark and checking the clew with 5 lbs. tension at the clew mark.
4. Hold head at head mark and check the leach by checking the clew at the clew mark. (NO TENSION APPLIED)
5. Check the mid-girth by placing the head at the head mark and marking the leach at the 9'5" point with a pencil. Now mark the luff at the 8'7" point with a pencil in a similar manner. Measure the distance between the two pencil marks using the 6'3" mid girth marks.
6. Check for proper numbers and -R-B- insignia on both sides of sail.
7. Check for royalty label.