

SAIL SPECIFICATION

	Spinnaker	No.	Luff	Foot	Leach	Perp.	Area
	1	2	32' 8"	11' 3"	33' 9"	11' 3"	184
	2	10	21' 0"	9' 6"	17' 0"	7.15	75
	3	8	30' 5"	13' 9"	27' 0"	12.20	185
	4	6	37' 6"	19' 9"	36' 11"	19.0	350
	5	0	32' 10"	15' 5"	31' 5"	14.8	243
	6	8	36' 0"	19' 0"	36' 4"	18.5	333
	7	23(Hy)	35' 0"	21' 0"	36' 6"	20.4	370
	8	23(Hy)	35' 0"	25' 6"	34' 0"	23.0	414
	9	1.7(Hy)	37' 9"	22' 9"	37' 9"		700

10.00 - 37.72, 3 - 12.58

to have taped luff; roach 9"; headb'd 4";
 28" & 25"; slides H91 taped on;
 151/100 roller reefing.

to have plastic coated wire luffs, SS thimbles
 and bronze hanks, except that No 1 Genoa is
 to have adjustable luff.

to have luff and leach taped in different
 colours; 16" roach on foot;
 nylon-coated bag to clip to
 clewhead.


to have luff; PVC coated, secured by elastic
 and hooks under boom and on fore side
 of mast.

When this is required, the
 streets to be 3'9" deep each and to



be approximately 18"

spacing.

2 sheaves on starb side, one on port

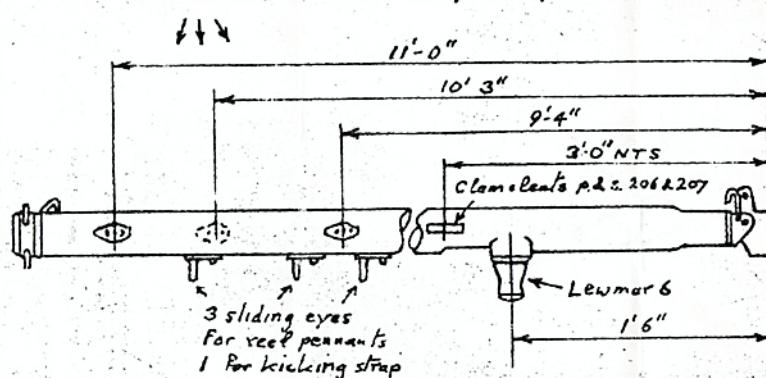

BOOM FOR SLAB REEFING - Scale 1" = 1'-0"

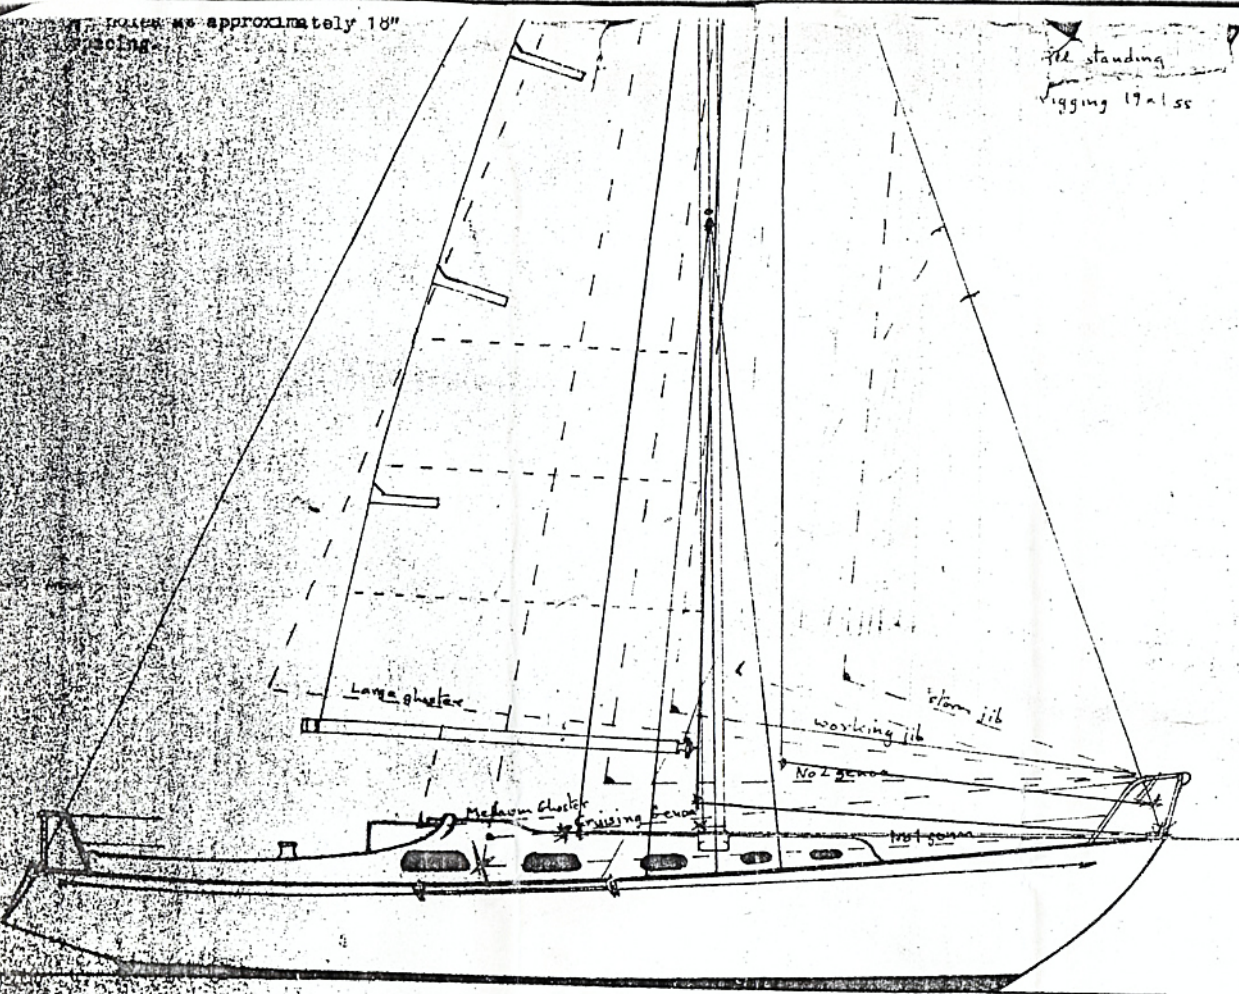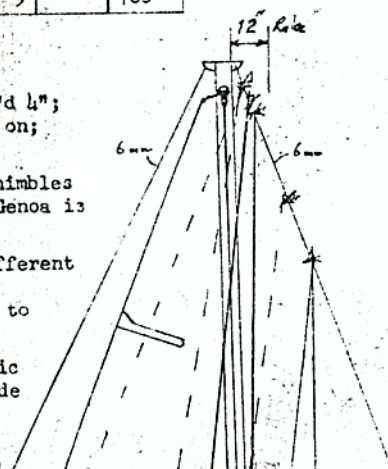

RIVAL 34 SAIL PLAN

scale 1/4" = 1'-0"