



Spars, Rigging, and Hardware for Sailboats

Rig-Rite, Inc.


Phone: (001) 401-739-1140 -- FAX: (001) 401-739-1149

www.RigRite.com [Spartan Ordering/Questions](#)

Spartan S-1 Spar System

Spartan S-1 Spar System

The Spartan S-1 Spar System was developed for small sailing craft that need a quick, effective means of setting sail. The S-1 Spar System is a **Gunter Rig** using a 2" OD round aluminum Mast and a 1 1/2" OD round Boom and Sprit (or Gaff or Yard, but technically, not really any of the three). Commonly used on the **Cape Dory 10 & Cape Dory 14**, in a variety of lengths, as well as Squadron Yachts **Molly Brown** and **Buttercup**, the S-1 Spar System is suitable for a variety of similar vessels.

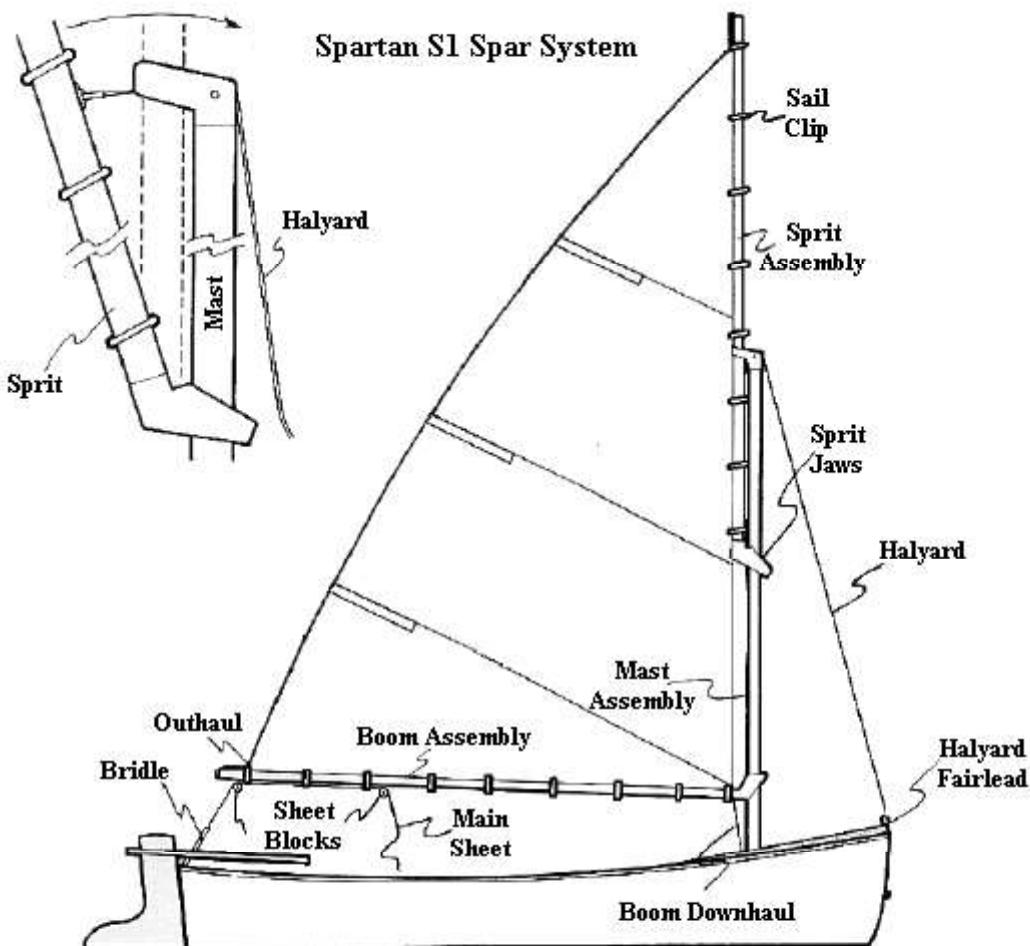

S-1 Complete Rig Kit: SP-S1RigKit:

Standard Spartan S-1 Rig Kit includes all components necessary to assemble a Complete set of S-1 Spars. Kit includes (1) 2" OD x 12' Mast Tube with Masthead, **SP-003**, and Mast Base Plug, **SP-006**; (2) 1 1/2" OD x 10' 8" Boom & Sprit Tubes with (2) Boom/Sprit Gooseneck Jaws, **SP-008**, (2) Boom Cap with Eye, **SP-011**, (4) Eyestraps, **SP-215**, (2) Mainsheet Blocks, **SP-215B**, and (20)

3/16" SS pop-rivets to fasten all components. Simply cut tubes to the desired lengths and assemble components.

S-1 Mast Assembly: SP-001MA-__:

Mast Assembly for S-1 Gunter Rig. Assembly includes 2" OD tube with **SP-003** Masthead and **SP-006** Mast Base Plug. Standard tube length is 12', specify if other length is required.



S-1 Masthead: SP-003:

Masthead for S-1 Gunter Rig Mast. Cast aluminum Masthead fits 2" OD tube and includes removable sheave and bushing. Clear anodized assembly is fastened to Mast with two (2) 3/16" (5mm) rivets or screws.

S-1 Mast Tube: SP-001T:

Mast Tube for S-1 Spar System is clear Anodized 2" OD x .083" wall thickness. Standard tube length is 12', specify if other length is required.

S-1 Mast Base Plug: SP-006:

Mast Base Plug for S-1 Mast. Plastic Plug fastens to 2" OD Mast with two (2) 3/16" (5mm) rivets or screws.

S-1 Boom Assembly: SP-007BA-__:

Boom Assembly for S-1 Gunter Rig. Assembly includes 1 1/2" OD tube with **SP-008** Gooseneck, **SP-011** End Cap with Eye and (3) **SP-215** Eyestraps with (2) **SP-215B** Mainsheet Blocks. Standard tube length is 10' 8", specify if other length is required.

S-1 Sprit Assembly: SP-007SA-__:

Sprit Assembly for S-1 Gunter Rig. Assembly includes 1 1/2" OD tube with **SP-008** Gooseneck, **SP-011** End Cap with Eye and **SP-215** Eyestrap for halyard attachment. Standard tube length is 10' 8", specify if other length is required.



S-1 Boom/Sprit Gooseneck Jaw: SP-008:

Gooseneck Jaw for S-1 Gunter Rig Boom and Sprit. Cast aluminum Gooseneck fits 1 1/2" OD tube. Clear anodized assembly is fastened to Boom or Sprit with two (2) 3/16" (5mm) rivets or screws.

S-1 Boom/Sprit Tube: SP-007T:

Boom/Sprit Tube for S-1 Spar System is clear Anodized 1 1/2" OD x .065" wall thickness. Standard tube length is 10' 8", specify if other length is required.

Boom/Sprit Outboard End Cap: SP-011:

End Cap with Eye for S-1 Boom and Sprit. Molded Plastic End attaches to 1 1/2" OD Boom or Sprit with (1) 3/16" (5mm) rivet or screw.

Eyestrap for Main Halyard and Block Attachment SP-215:

SS Eyestrap is fastened to Boom or Sprit with two (2) 3/16" (5mm) rivets or screws.

Mainsheet Block SP-215B:

SS Mainsheet Block with delrin sheave fits under **SP-215** Eyestrap. The S-1 Boom Assembly normally uses 2 Blocks.

Sail Clips for S-1 Rig: SP-014-20:

White plastic Clip attaches Sail to Boom and Sprit. In packages of 20 pieces.

CD-10 Mainsail: SP-CD10Sail:

Mainsail for Cape Dory 10 with standard Spartan S-1 Spars comes with 3 battens and sail bag. Dacron Sail attaches to Boom and Sprit with **SP-014** Sail Clips, above (purchase separately).

Kenyon also manufactures a variety of fittings for 1 1/2" Round Booms, See [Kenyon Spars 1 1/2" Boom Section.](#)

~ [Back to Spartan Main Page](#) ~

~ [Back to Rig-Rite Home Page](#) ~