STILETTO 27 SE

STILETTO CATAMARANS

Home Up Sail Plan

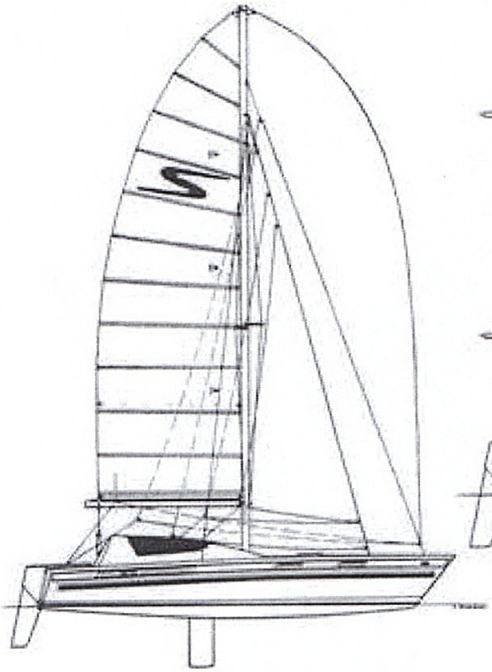

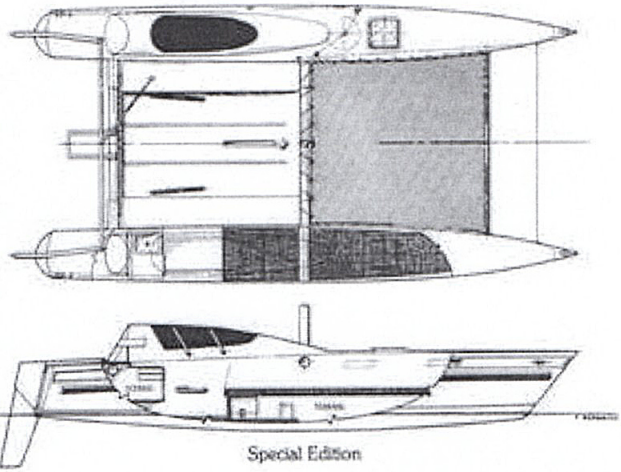

Manufactured with HONEYCOMB OF NOMEX

Specifications

LOA ..... 26' 10"
LWL ..... 24'
Beam ..... 13' 10"
Telescoped Width ..... 7' 11½"
Set Up Time ..... 1 hr.
Draft ..... 9" board up
4' board down

Sail Area:
Main ..... 230 sq. ft. (fully battened)
Jib ..... 106 sq. ft.
Genoa ..... 159 sq. ft.
Reacher/Drifter ..... 265 sq. ft.
Spinnaker ..... 750 sq. ft.

Hull: Aircraft epoxy/fiberglass and honeycomb composite
Weight: 1,100 lbs. Std. Stiletto; 1,200 lbs. Championship Edition; 1570 lbs. Special Edition
Design Speed: 22 MPH +
Mast: Polyurethane coated aluminum extrusion (rotating airfoil design)
Bridgedeck: Fiberglass with molded seats
Daggerboard: Centerline mounted
Rudders: Automatic kick-up and return
Standing Rigging: Stainless steel
Running Rigging: Harken blocks throughout, Internal halyards, Full length traveler
Misc. Hardware: Custom stainless steel
Auxiliary: Custom bracket for up to 15 h.p. outboard

STILETTO
performance in cruising catamarans
Manufactured by
FORCE ENGINEERING
5329 Ashton Ct., Sarasota, FL 33583 (813) 923-1857