
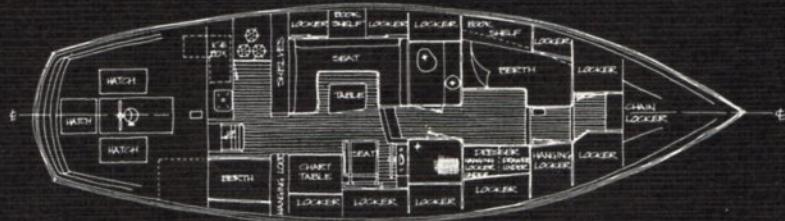


C.T. 41

PILOT HOUSE KETCH

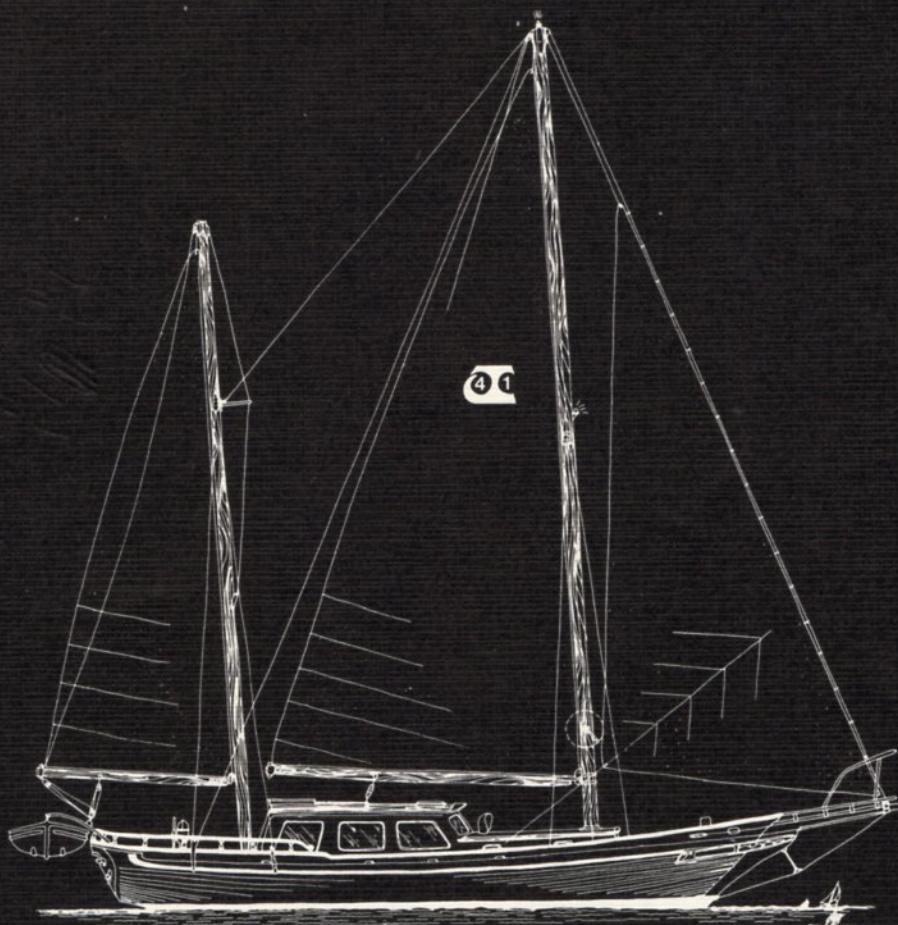

Length Overall _____ 40' - 8"
Length at Water Line _____ 31' - 8"
Maximum Beam _____ 12' - 2"
Draft _____ 6' - 0"

SPECIFICATIONS

With her simple Marconi ketch rig, the CT-41 is a fine "Man and Wife" boat-no sail too large to be handled by one person, and when shortened down, she will balance under jib and mizzen or under main alone. Included as standard equipment are dacron working sails, pressure water system, hot water heater, shower, bow pulpit with teak catwalk, stanchions and lifelines, and much more. Custom interiors are available and can be arranged to suit individual requirements.

Hull and deck

One piece heavy molded fiberglass hull and one piece molded fiberglass deck with plywood cabin with two layers of fiberglass cloth over. The whole deck is built in sandwich construction with wooden core for extra strength, Rigidity and insulation; Teak deck is optional.

Spars

Selected spruce, hollow-box mast and booms with bronze and stainless steel fittings. With necessary blocks and cleats. Aluminum spars is optional.

Sails

Mainsail is 8 oz dacron with two rows of reefing points.

Jib sail is 7 oz dacron.

Mizzen sail is 6 oz dacron with single row of reefing points.

Joinerwork and finish

All exterior and interior is teak trim. Oiled or natural finished.

Varnish finished is optional.

Electrical system

All wiring is done to international specifications.

12-volt electrical power system for dome lights, reading lights, navigation lights and deck lights, with fuses.

110-volt power system with shore power connector for hot water heater and outlets with circuit breakers.

Plumbing

12-volt pressure pump for hot and fresh water system. One manual bilge pump and 12-volt electric bilge pump. All thru-hull fittings with seacocks.

Water and Fuel Tanks

100 gallons stainless steel water tank.

150 gallons black iron fuel tank.

Steering

Pedestal steering with 30" wheel. Inside steering is available.

Engine (Optional)

Volvo penta MD-21A, or Perkins 4-108, or equal. .

Standard Equipments List

1. Main sail, 8 oz. with two rows of reef points.
2. Jib sail, 7 oz. dacron
3. Mizzen sail 6 oz. dacron with single row of reef points
4. Sail covers for main, jizzen & jib
5. Block & shackles for main, mizzen, jib & dinghy davits
6. Dinghy with stainless steel davits & oars
7. Two #22 stainless steel jib sheet winches with handle & 8 cleats
8. One #20 bronze main sheet winch with handle & 6" cleat
9. Two #15 top action bronze main halyard winches with handle & 8" cleats
10. One #15 top action bronze mizzen halyard winch with handle & 8" cleat
11. Pin rail for main & mizzen using hardwoods with 12 belaying pins
12. Fresh water system with 12 volt pressure pump for hot & cold water
13. Eight gallons hot water heater using 110 volts or engine cooling system
14. One hand bilge pump & 12 volt electric pump for bilge & sump water
15. One hand toilet for forward main head (two for after cabin model)
16. Double lifelines
17. Roller chocks both port & starboard on bowsprit
18. Formica galley surfaces
19. Teak grating cockpit floor
20. Stainless rim around circumference of teakwheel
21. Emergency tiller
22. Cushions with vinyl covered
23. Teak cabin sole
24. Shore power connecting plug
25. Stainless steel muffler for engine exhaust pipe
26. Propeller shaft
27. Strainer for engine cooling water intake
28. Boat hook
29. Name boards
30. Dorade vent (only for pilot house model)
31. Mushroom vent over galley

J = 16' 2"
~~*J*~~ *I = 46.32*

Distributed by:

GOLDEN WEST YACHTS

14025 PANAY WAY

MARINA DEL REY, CA 90291

(213) 823-3838