


# ISLANDER 316

LOA	36'1"
LWL	28'3"
Beam	11'2"
Draft	
Standard	6'0"
Shoal	4'9"
Displacement	
Standard	13,450 lbs.
Shoal	13,600 lbs.
Ballast	
Standard	5,450 lbs.
Shoal	5,600 lbs.
Vertical Clearance	49'0"
Ballast/D	41%
D/L	266.
SA/D	16.3
Sail Area	575 sq. ft.
Main	250 sq. ft.
100% Fore Δ	325 sq. ft.
Power	Diesel
Fuel	32 gals.
Water	54 gals.
Designer	Alan Gurney

CRAIG FOLEY YACHTS  
25007 DOL TRACO  
DANA POINT, CA 92629  
(714) 493-1011

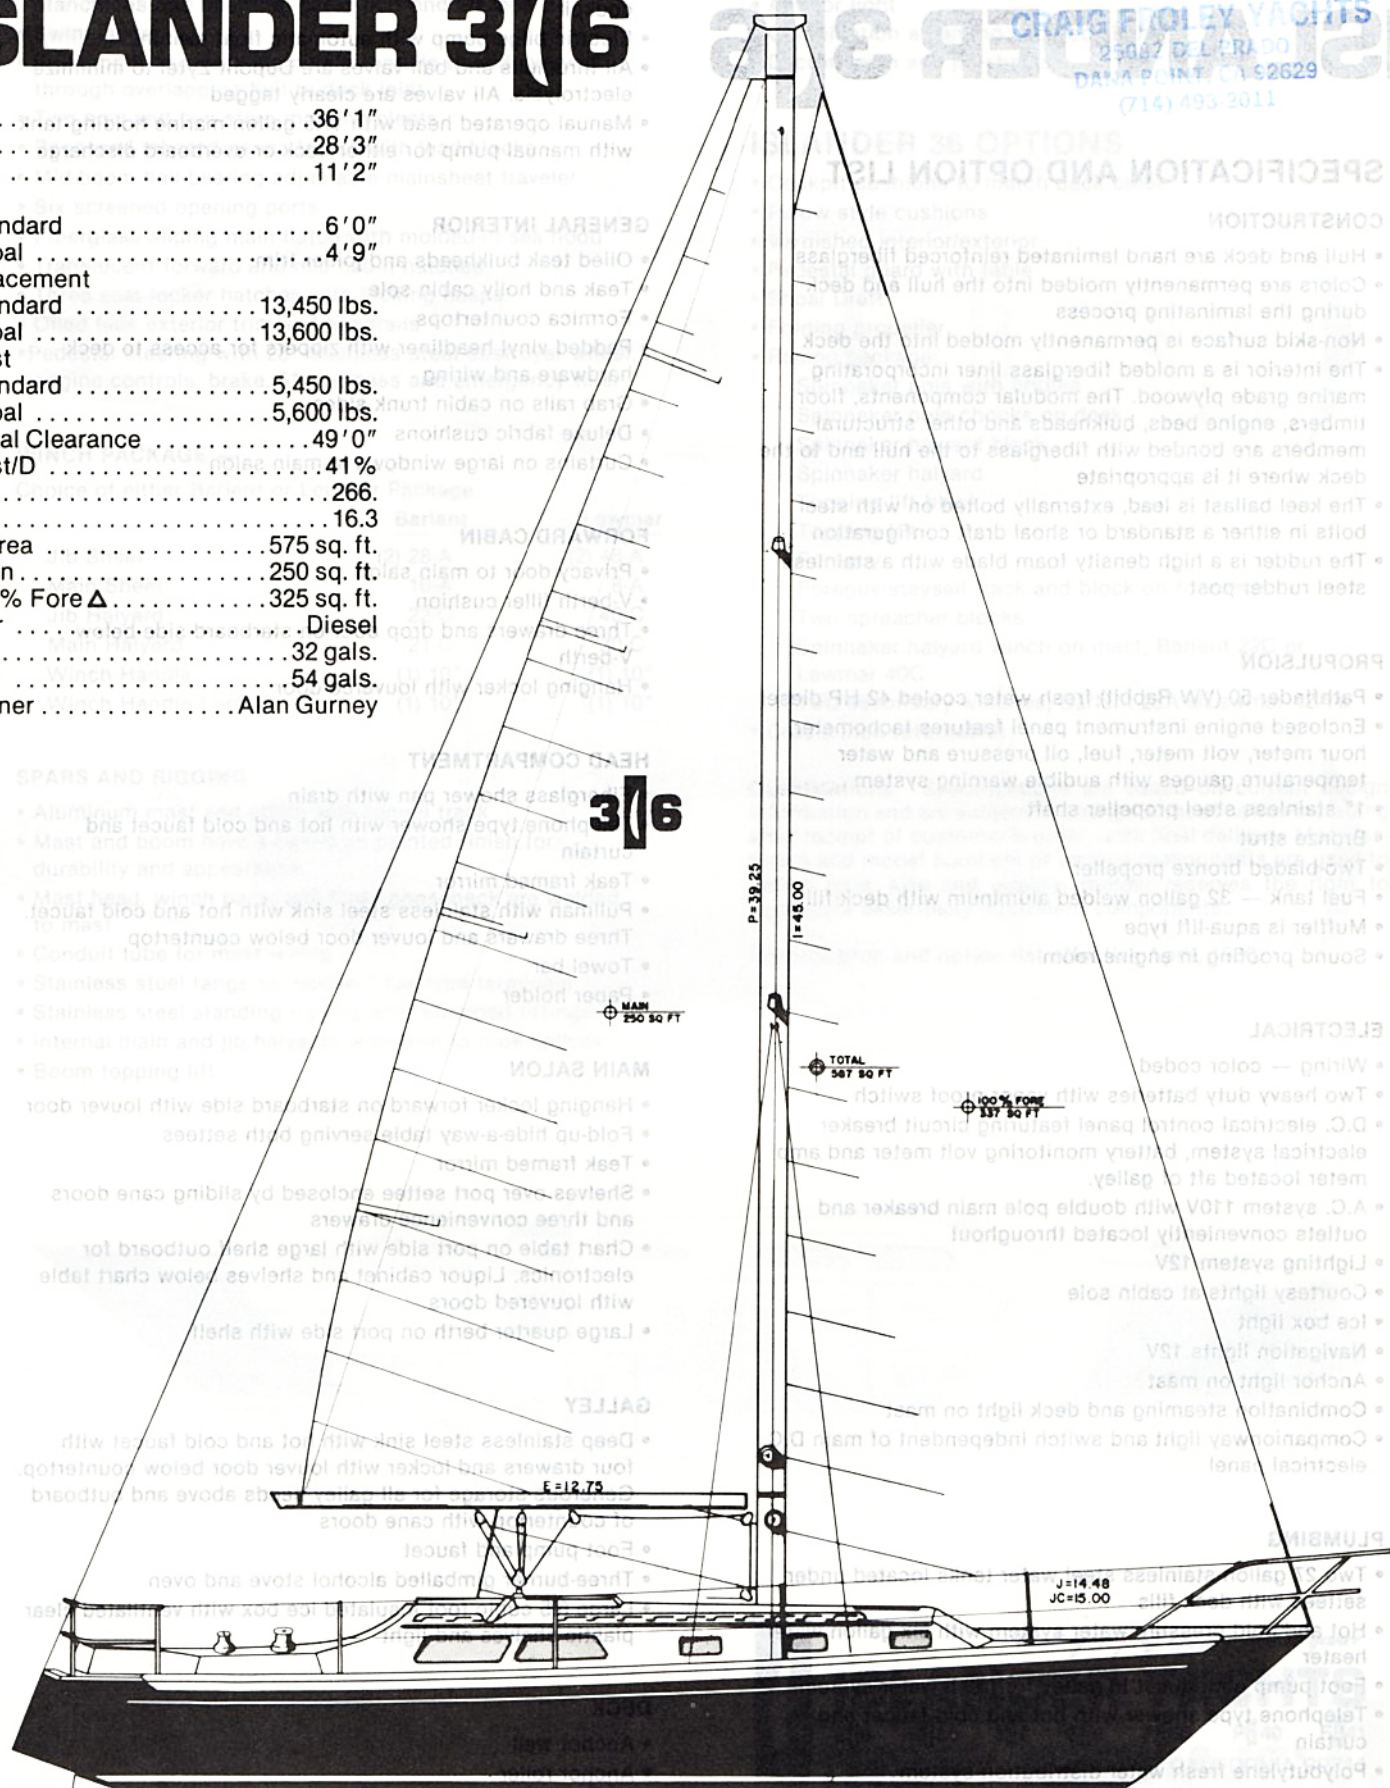

NOTE: SOME ITEMS SHOWN MAY BE OPTIONAL



# ISLANDER 316

## SPECIFICATION AND OPTION LIST

### CONSTRUCTION

- Hull and deck are hand laminated reinforced fiberglass
- Colors are permanently molded into the hull and deck during the laminating process
- Non-skid surface is permanently molded into the deck
- The interior is a molded fiberglass liner incorporating marine grade plywood. The modular components, floor timbers, engine beds, bulkheads and other structural members are bonded with fiberglass to the hull and to the deck where it is appropriate
- The keel ballast is lead, externally bolted on with steel bolts in either a standard or shoal draft configuration
- The rudder is a high density foam blade with a stainless steel rudder post

### PROPULSION

- Pathfinder 50 (VW Rabbit) fresh water cooled 42 HP diesel
- Enclosed engine instrument panel features tachometer, hour meter, volt meter, fuel, oil pressure and water temperature gauges with audible warning system
- 1" stainless steel propeller shaft
- Bronze strut
- Two-bladed bronze propeller
- Fuel tank — 32 gallon welded aluminum with deck fill
- Muffler is aqua-lift type
- Sound proofing in engine room

### ELECTRICAL

- Wiring — color coded
- Two heavy duty batteries with vapor proof switch
- D.C. electrical control panel featuring circuit breaker electrical system, battery monitoring volt meter and amp meter located aft of galley.
- A.C. system 110V with double pole main breaker and outlets conveniently located throughout
- Lighting system 12V
- Courtesy lights at cabin sole
- Ice box light
- Navigation lights 12V
- Anchor light on mast
- Combination steaming and deck light on mast
- Companionway light and switch independent of main D.C. electrical panel

### PLUMBING

- Two 27 gallon stainless steel water tanks located under settees with deck fills
- Hot and cold pressure water system with six gallon water heater
- Foot pump and faucet in galley for fresh water system
- Telephone type shower with hot and cold faucet and curtain
- Polybutylene fresh water distribution system

- Bilge pump 15 gal/min. diaphragm type operated from cockpit
- Electric bilge pump with automatic float switch
- All thru-hulls and ball valves are Dupont Zytel to minimize electrolysis. All valves are clearly tagged
- Manual operated head with 17.5 gallon marine holding tank with manual pump for either deck or overboard discharge

### GENERAL INTERIOR

- Oiled teak bulkheads and joiner trim
- Teak and holly cabin sole
- Formica countertops
- Padded vinyl headliner with zippers for access to deck hardware and wiring
- Grab rails on cabin trunk sides
- Deluxe fabric cushions
- Curtains on large windows in main salon

### FORWARD CABIN

- Privacy door to main salon
- V-berth filler cushion
- Three drawers and drop door on starboard side below V-berth
- Hanging locker with louvered door

### HEAD COMPARTMENT

- Fiberglass shower pan with drain
- Telephone type shower with hot and cold faucet and curtain
- Teak framed mirror
- Pullman with stainless steel sink with hot and cold faucet. Three drawers and louver door below countertop
- Towel bar
- Paper holder

### MAIN SALON

- Hanging locker forward on starboard side with louver door
- Fold-up hide-a-way table serving both settees
- Teak framed mirror
- Shelves over port settee enclosed by sliding cane doors and three convenience drawers
- Chart table on port side with large shelf outboard for electronics. Liquor cabinet and shelves below chart table with louvered doors
- Large quarter berth on port side with shelf

### GALLEY

- Deep stainless steel sink with hot and cold faucet with four drawers and locker with louver door below countertop. Generous storage for all galley needs above and outboard of countertop with cane doors
- Foot pump and faucet
- Three-burner gimbaled alcohol stove and oven
- Large 6.5 cubic foot insulated ice box with ventilated clear plastic shelves and light

### DECK

- Anchor well
- Anchor roller



- Double rail bow and stern pulpits with double lifelines, stanchions and boarding gates port and starboard
- Swim ladder
- Full length anodized aluminum toerails bolted every 4" through overlapping hull to deck joint
- Two bow and two stern mooring cleats
- Recessed inboard genoa tracks with lead blocks
- Mid-boom ball bearing adjustable mainsheet traveler
- Six screened opening ports
- Fiberglass sliding main hatch with molded-in sea hood
- Translucent forward and mid cabin hatches
- Three seat locker hatches with locking hasps
- Oiled teak exterior trim and handrails
- Pedestal steering with 28" stainless steel destroyer wheel, engine controls, brake, 5" compass and emergency tiller

#### WINCH PACKAGE —

Choice of either Barient or Lewmar Package

	<b>Barient</b>	<b>Lewmar</b>
Jib Sheet	(2) 28-A	(2) 48-A
Main Sheet	10-A	8-A
Jib Halyard	22-C	40-C
Main Halyard	21-C	30-C
Winch Handle	(1) 10"	(1) 10"
Winch Handle Lock-In	(1) 10"	(1) 10"

#### SPARS AND RIGGING

- Aluminum mast and boom with tunnel track
- Mast and boom have a baked-on painted finish for durability and appearance
- Mast head, winch pads, and fixed gooseneck are welded to mast
- Conduit tube for mast wiring
- Stainless steel tangs to receive T-bar type terminals
- Stainless steel standing rigging with swaged fittings
- Internal main and jib halyards with wire to rope splices
- Boom topping lift

- Mast winches, refer to winch package under Deck Category
- Anchor light
- Combination steaming and deck light
- Dacron main and jib sheets

#### ISLANDER 36 OPTIONS

- Cockpit cushions to match deck color
- Pillow style cushions
- Varnished interior/exterior
- Pedestal guard with table
- Shoal Draft
- Folding propeller
- Racing package:
  - Spinnaker pole with bridles
  - Spinnaker pole chocks on deck
  - Spinnaker halyard block
  - Spinnaker halyard
  - Topping lift block
  - Topping lift
  - Foreguy
  - Foreguy/staysail track and block on foredeck
  - Two spreader blocks
  - Spinnaker halyard winch on mast, Barient 22C or Lewmar 40C
  - Two secondary winches, Barient 25A's/Lewmar 42A's
- Cradle (non returnable)

Qualifications: Specifications are based on current design information and are subject to change without notice including after receipt of customer's order, until final delivery. Manufacturers and model numbers of various components are used to define type, size and quality. Builder reserves the right to substitute essentially equivalent components.

Specification and option list effective April, 1980.






*leading in performance and elegance*

**ISLANDER YACHTS**

28 B30 32 36 F36 P40 F41

1922 BARRANCA ROAD, IRVINE, CALIFORNIA 92714



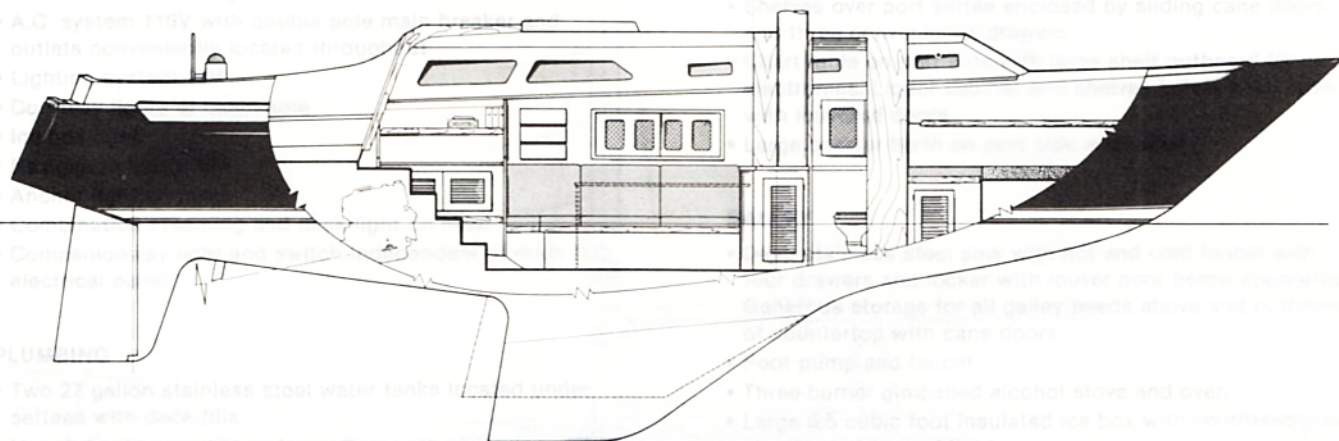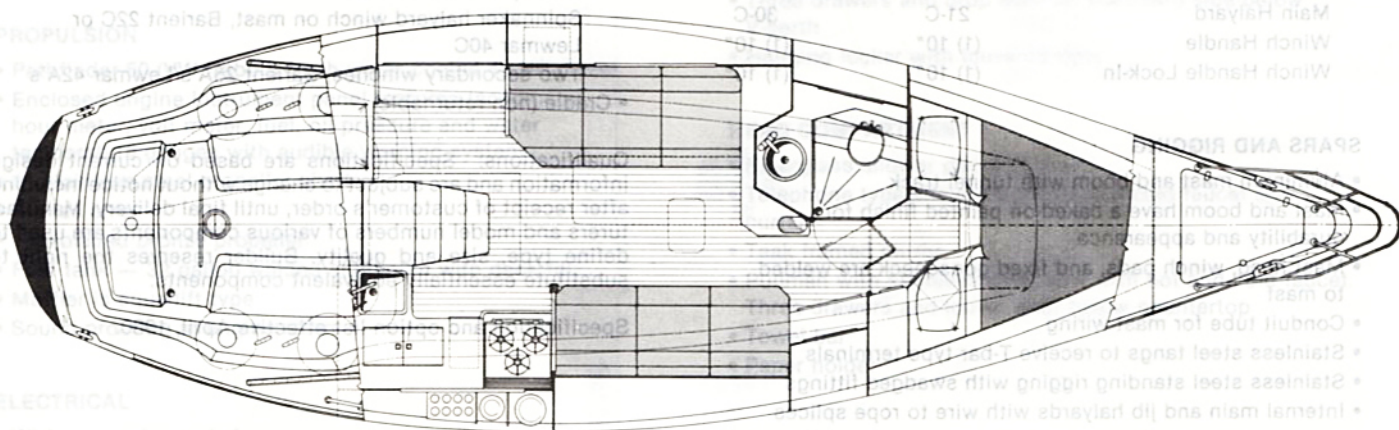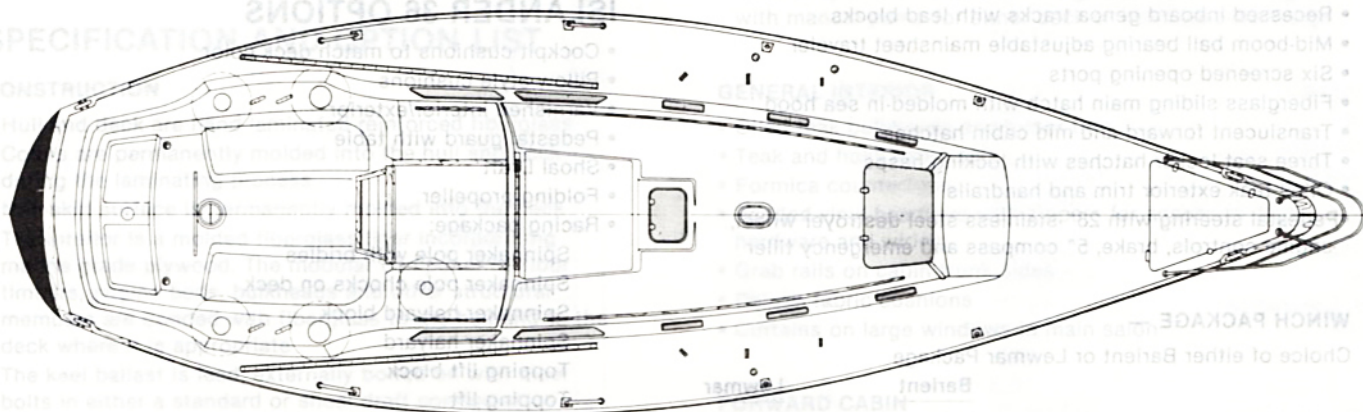

*leading in performance and elegance*

# ISLANDER YACHTS

208 B030 302 306 F036 P040 F041  
1922 BARRANCA ROAD, IRVINE, CALIFORNIA 92714