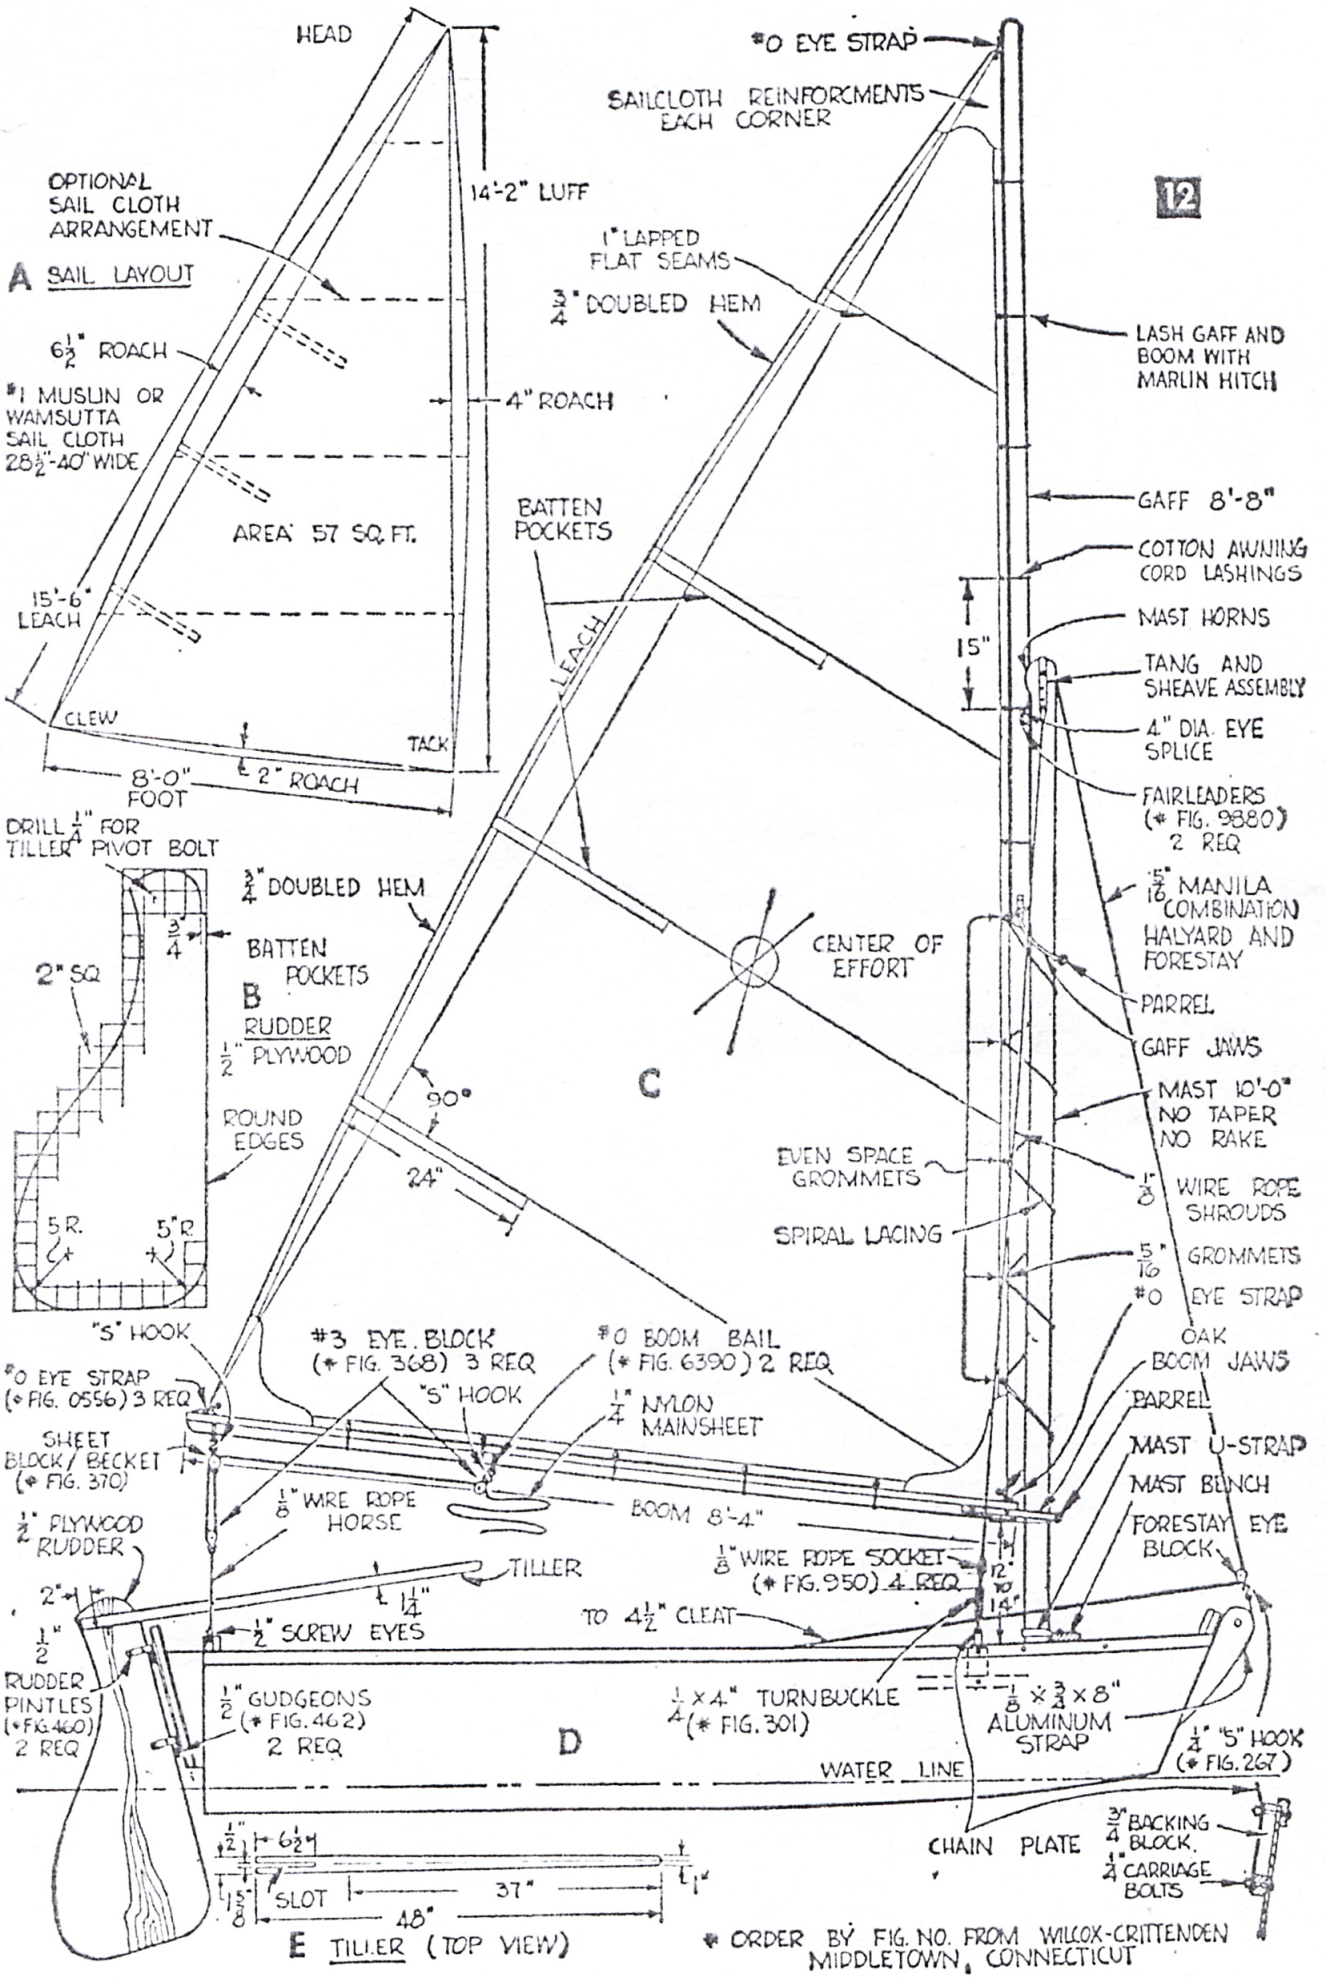
12
A SAIL LAYOUT
HEAD
14'-2" LUFF
OPTIONAL SAIL CLOTH ARRANGEMENT
6½" ROACH
#1 MUSLIN OR WAMSUTTA SAIL CLOTH 28½"-40" WIDE
4" ROACH
AREA 57 SQ. FT.
15'-6" LEACH
CLEW
TACK
8'-0" FOOT
2" ROACH
#0 EYE STRAP
SAILCLOTH REINFORCMENTS EACH CORNER
1" LAPPED FLAT SEAMS
¾" DOUBLED HEM
BATTEN POCKETS
LEACH
LASH GAFF AND BOOM WITH MARLIN HITCH
GAFF 8'-8"
COTTON AWNING CORD LASHINGS
MAST HORNS
15"
TANG AND SHEAVE ASSEMBLY
4" DIA. EYE SPLICE
FAIRLEADERS (# FIG. 9880) 2 REQ
5/16" MANILA COMBINATION HALYARD AND FORESTAY
PARREL
GAFF JAWS
MAST 10'-0" NO TAPER NO RAKE
1/8" WIRE ROPE SHROUDS
5/16" GROMMETS
#0 EYE STRAP
OAK BOOM JAWS
PARREL
MAST U-STRAP
MAST BENCH
FORESTAY EYE BLOCK
DRILL ¼" FOR TILLER PIVOT BOLT
¾" DOUBLED HEM
¾"
BATTEN POCKETS
2" SQ.
B RUDDER
½" PLYWOOD
ROUND EDGES
5" R.
5" R.
CENTER OF EFFORT
C
90°
24"
EVEN SPACE GROMMETS
SPIRAL LACING
"S" HOOK
#3 EYE BLOCK (# FIG. 368) 3 REQ
#0 BOOM BAIL (# FIG. 6390) 2 REQ
#0 EYE STRAP (# FIG. 0556) 3 REQ
"S" HOOK
¼" NYLON MAINSHEET
SHEET BLOCK/BECKET (# FIG. 370)
⅛" WIRE ROPE HORSE
BOOM 8'-4"
½" PLYWOOD RUDDER
TILLER
⅛" WIRE ROPE SOCKET (# FIG. 950) 4 REQ
12" TO 14"
2"
1¼"
½" SCREW EYES
TO 4½" CLEAT
½"
RUDDER PINTLES (# FIG. 460) 2 REQ
½" GUDGEONS (# FIG. 462) 2 REQ
¼ x 4" TURNBUCKLE (# FIG. 301)
⅛ x ¾ x 8" ALUMINUM STRAP
¼" "S" HOOK (# FIG. 267)
D
WATER LINE
CHAIN PLATE
¾" BACKING BLOCK
¼" CARRIAGE BOLTS
½"
6½"
1⅝"
SLOT
37"
48"
E TILLER (TOP VIEW)
ORDER BY FIG. NO. FROM WILCOX-CRITTENDEN MIDDLETOWN, CONNECTICUT