

VIVACITY 21



SPECIFICATION

Your Standard VIVACITY 21 will include:—

SAILS

Terylene mainstay and jib, sailbag and battens, insignia, number and Royalty paid.

SPARS

Corrosive resistant alloy mast and boom fitted with worm gear reefing. Two halliard cleats and topping lift cleat fitted.

FITTINGS

Stemhead roller fitting in manganese bronze.

2 sheet belaying cleats fitted.

1 aft mooring cleat.

1 bow samson post bonded to hull.

1 forehatch with optional friction stays.

8 stainless steel chain plates.

Cast alloy hinged mast step.

2 off 3in. sheet winches fitted.

Prestretched terylene halliards.

Ulstron main and jib sheets.

Laminated plastic blocks/stainless fittings.

Combined main sheet swivel block/jamb.

Boom end swivel fitting.

Manganese bronze tiller head fitting.

Stainless steel rudder shaft and tiller.

Forestay, twin back stays, top and two lower shrouds all in 1 x 19 s/s wire.

Alloy anodised framed windows fitted shatter-proof glass.

Shell ventilators and through craft air ducting.

GENERAL

Hull and coachroof double lined for strength, appearance and climatic usage.

All fittings reinforced below and bolted in position.


Only non-corrosive materials such as stainless and manganese bronze employed.

DATA

LOA	21' 3"	6.477 m.
LWL	19' 3"	5.842 m.
Beam	7' 2"	2.184 m.
Keels	Twin or Single	
Draft	2' 4" 0.71 m/3' 3" 0.99 m	
Headroom	4' 6"	1.47 m.
Berths	4/5	
Displacement	2500 lbs.	1033.9 kg
Ballast	1100 lbs.	498.9 kg.
Ratio		44%
Thames Measurement		3.70 tons

SAIL AREAS

	SQ. FT.	SQ. METERS
MAINSAIL	124	11.52
STAYSAIL	105	9.75
STORM JIB	28	2.6
AMERICAN GENDA	115	10.684
150% GENDA	126	11.7

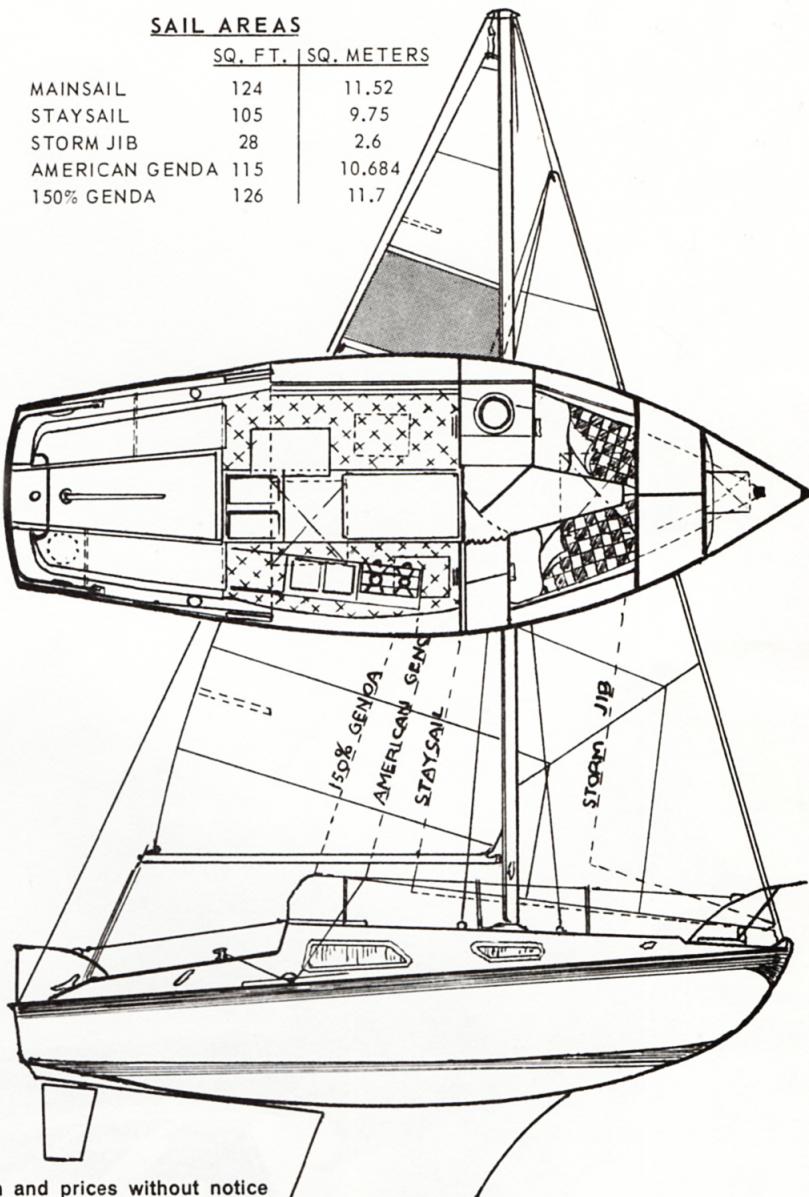

The Company reserves the right to change specification and prices without notice

SKS YACHT SALES

WEST COAST DISTRIBUTORS

7827 VICKSBURG AVE. LOS ANGELES 45 CALIF.

(213) 645-7927

17291 YOSEMITE CIRCLE, HUNTINGTON BEACH, CALIF.

(714) 847-0996