



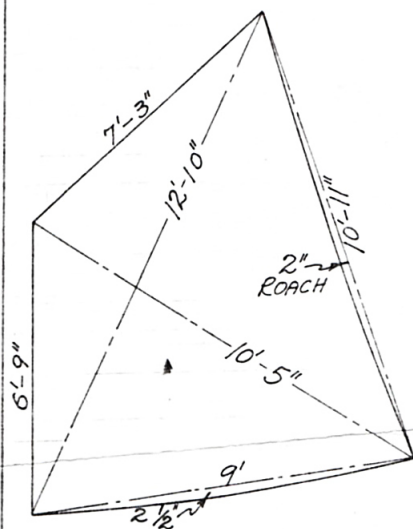

- 1 BOOM JAWS WHITE OAK, LOCUST, NATURAL CROOKS THRU RIVETED. MAST 10'-6" DIA. 3" TAPERED NEAR HEAD TO 7 3/4". BOOM LESS JAWS 9'-6" DIA. AT JAWS 1 5/8".
- 2 ROLLING HITCH, SNOTTER TO SPRIT. DIA. MIDDLE 2 1/4". DIA. END 1 3/8".
- 3 LEAD BLOCKS EITHER SIDE FOR 2-PART JIB SHEET. SPRIT 12'-9" DIA. LOWER END 1 1/2". DIA. MIDDLE 1 3/4". DIA. TOP 1 1/4". SHOULDERS TO 3/4" TO FIT PEAK GROMMET.
- 4 2 METAL PLATES BRONZE, BRASS, STAINLESS EITHER SIDE BLADE. FOUR LENGTHS OF BOAT BUILT FROM THESE MOLDS. 14-FT. BOAT AS SHOWN. 15-FOOT BOAT
- 5 BOTTOM RUDDER SUPPORT RIVETED THRU DEADWOOD WITH RUDDER PIVOT ROD FIXED IN IT. SPACING OF 4 CENTER MOLD STATIONS INCREASED 3". FRAME SPACING 9". ENDS UNCHANGED. 16-FT. BOAT OPEN AT STA 5
- 6 RUDDER PIVOT ROD 5/16" DIA. ADDING ANOTHER 2-FT. MOLD STATION.
- 7 SLOTTED RUDDER HINGE SLIPS ON PIVOT ROD WHEN RUDDER IS TILTED SIDEWAYS. FRAME SPACING 8". ENDS OF BOAT UNCHANGED. 17'-3" BOAT. SPACING OF 5 CENTER MOLDS INCREASED 3". FR. SPACING 9". ENDS UNCHANGED. NOTE. PLANK WIDTHS, SHEET
- 8 UPPER RUDDER HINGE SLIPS OVER TOP OF PIVOT ROD. TURNS ON UPPER SUPPORT. 1 ONLY APPROXIMATE. FAIR P. LINES ON SET-UP

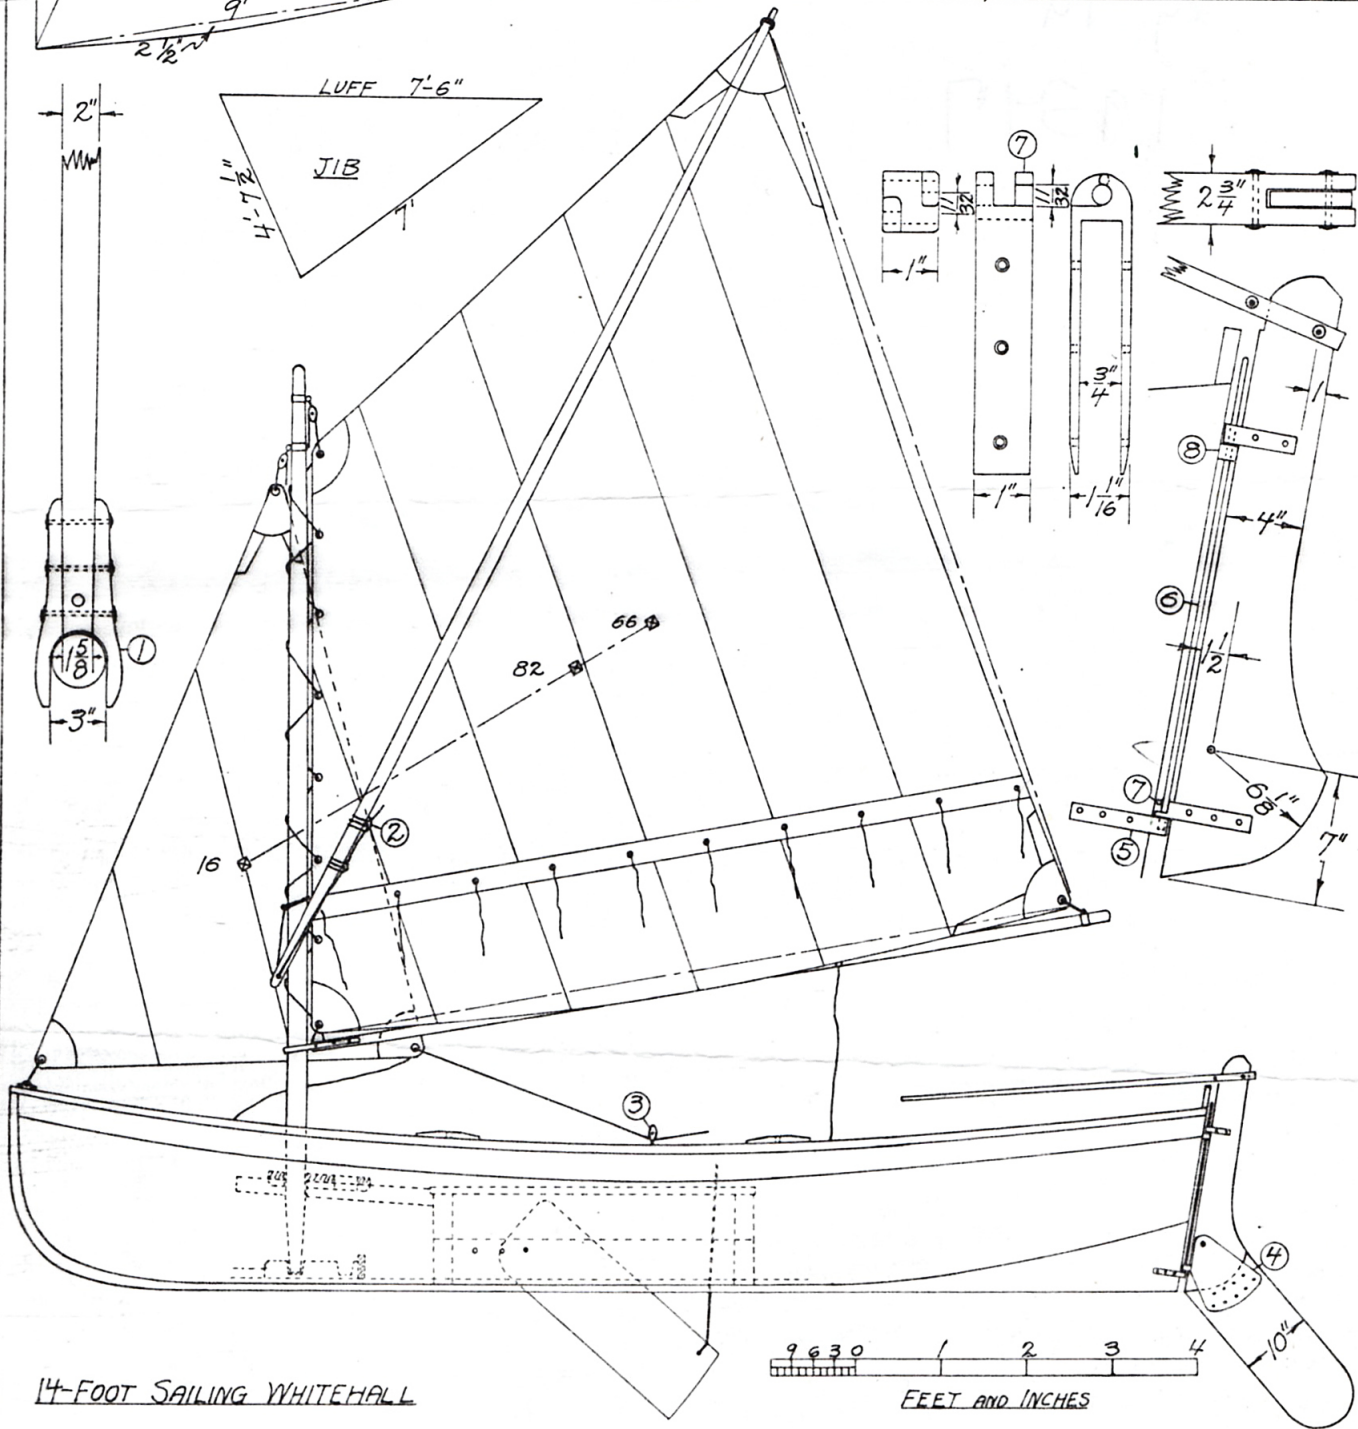

14-FOOT SAILING WHITEHALL