


Sail	Luff	Leach	Foot	Wgt.	Area
Mainsail	29' 4"	30' 0"	10' 5"	6.5oz	243sq.ft.
Jib	31' 0"	28' 1"	10' 1/2"	6.5oz	158sq.ft.
Asymetric Spinnaker	JC = 13' 1" Vert. Heng = 31' 5" Luff = 35' 6"			75ozN	601 sq. ft.

29' 4" 30' 10' 5"
31' 0" 28' 1"

NOTES:

MAINSAIL TO HAVE 2 SETS OF REEF POINTS
MAINSAIL TO HAVE 1 SET OF CUNNINGHAM EYES
CLASS EMBLEM TO BE LOCATED AS SHOWN
SAILMAKER MUST USE CORSAIR LOGO ARTWORK

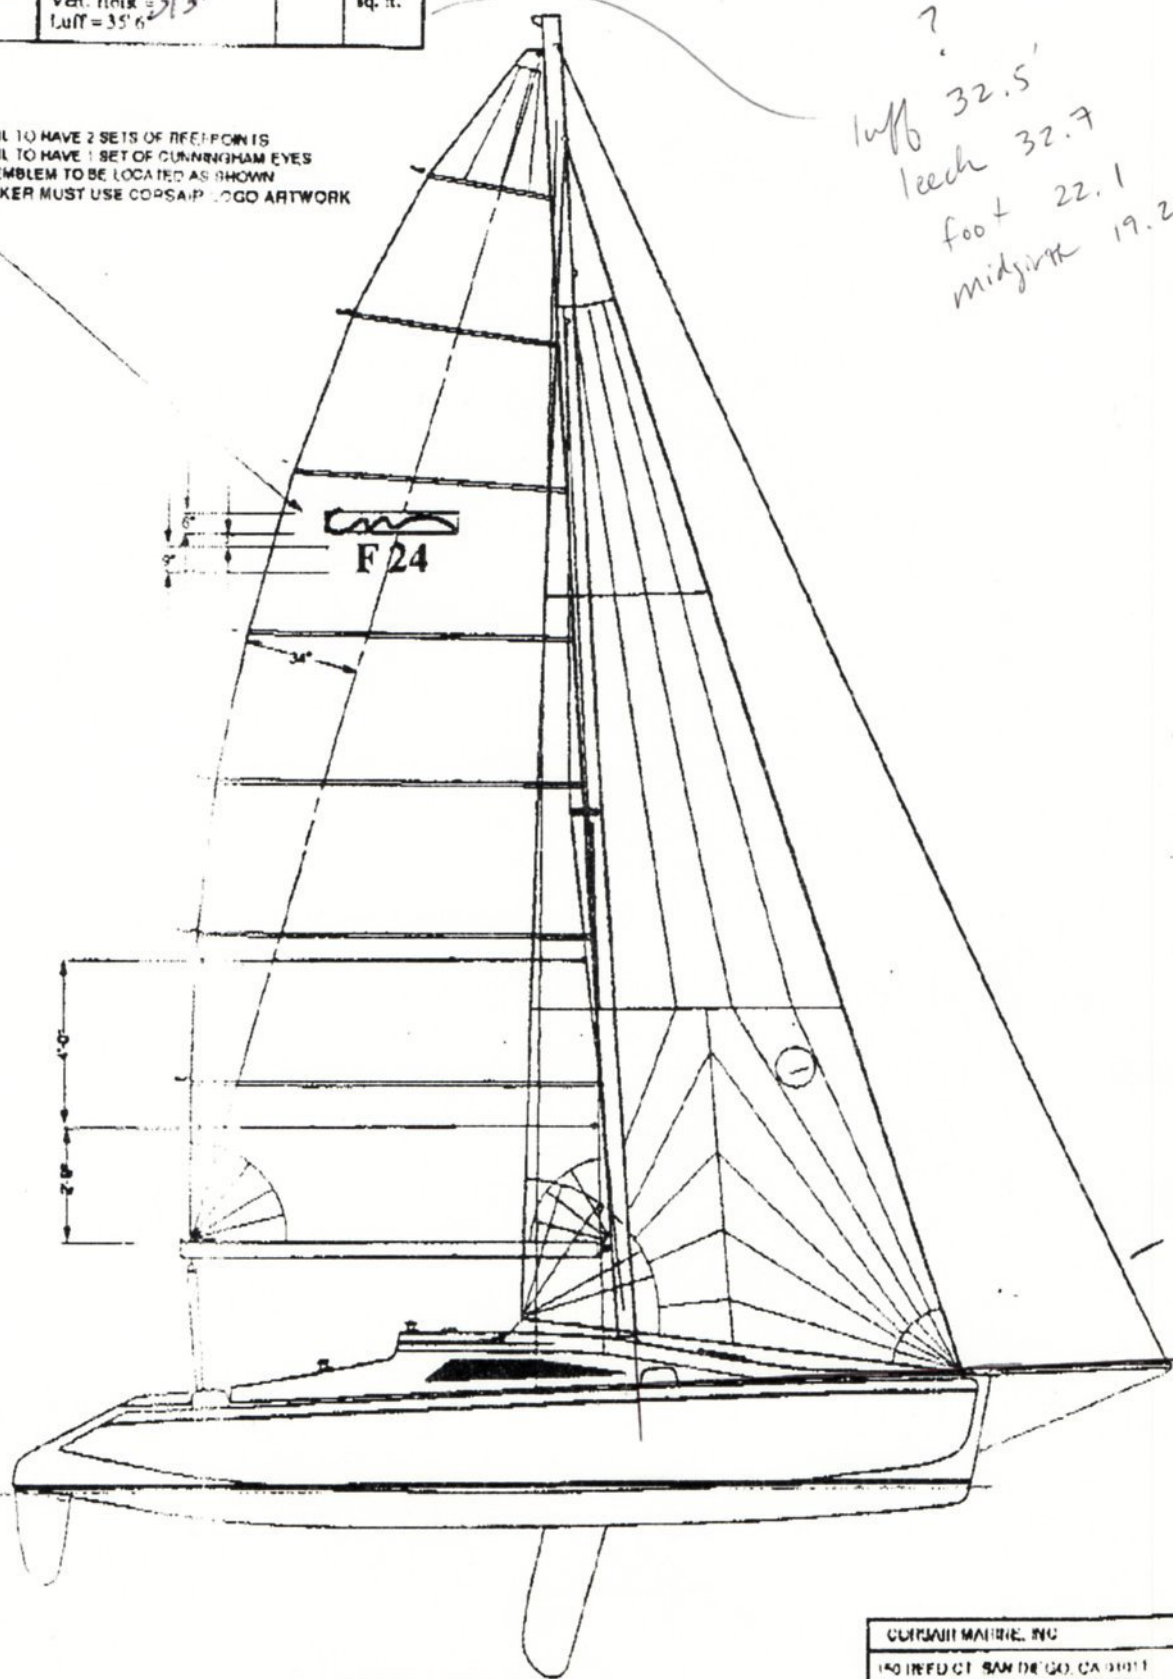

Sailmaker should be aware that the loadings on a Multihull's sails are considerably higher than on a monohull monohull due to the much greater maximum draft (18' vs 22.0000) etc.

CORSAIR MARINE, INC

140 REDD CT SAN DIEGO, CA 92111
PH: 619/585-1005 FAX: 619/585-1012

F24 - MAIN PLAN

NO SCALE 1:20000 1:500

Mainsail: 22.5sq.m. (243sq.ft.)
 Jib: 11.3sq.m. (122sq.ft.)
 Asymmetric Spinnaker
 Luff 9.71m, Leach 8.2m, Foot 4.2m
 Area = 52.8sq.m. (570sq.ft.)
 Screecher - Optional?

Cloth weight to sailmakers discretion
 Max. stability is 22,000 lbs


Mast to be Rotating

NOTES:

Mylar may be used for all sails (recommended).
 Sailcloth wgt. may be varied to suit wind in area sailed.
 All sails are to be fitted with telltales
 Mainsail has 2 sets of reefpoints positioned as shown
 Mainsail to have Cunningham eye fitted
 Class emblem to be located and sized as shown.
 Jib to have 3 leach battens placed at equal distance on leach.

NOTE: BOLT ROPE SIZE TBA

SPINNAKER
 L 9.4m, LC 8.15m, LP 4.70m

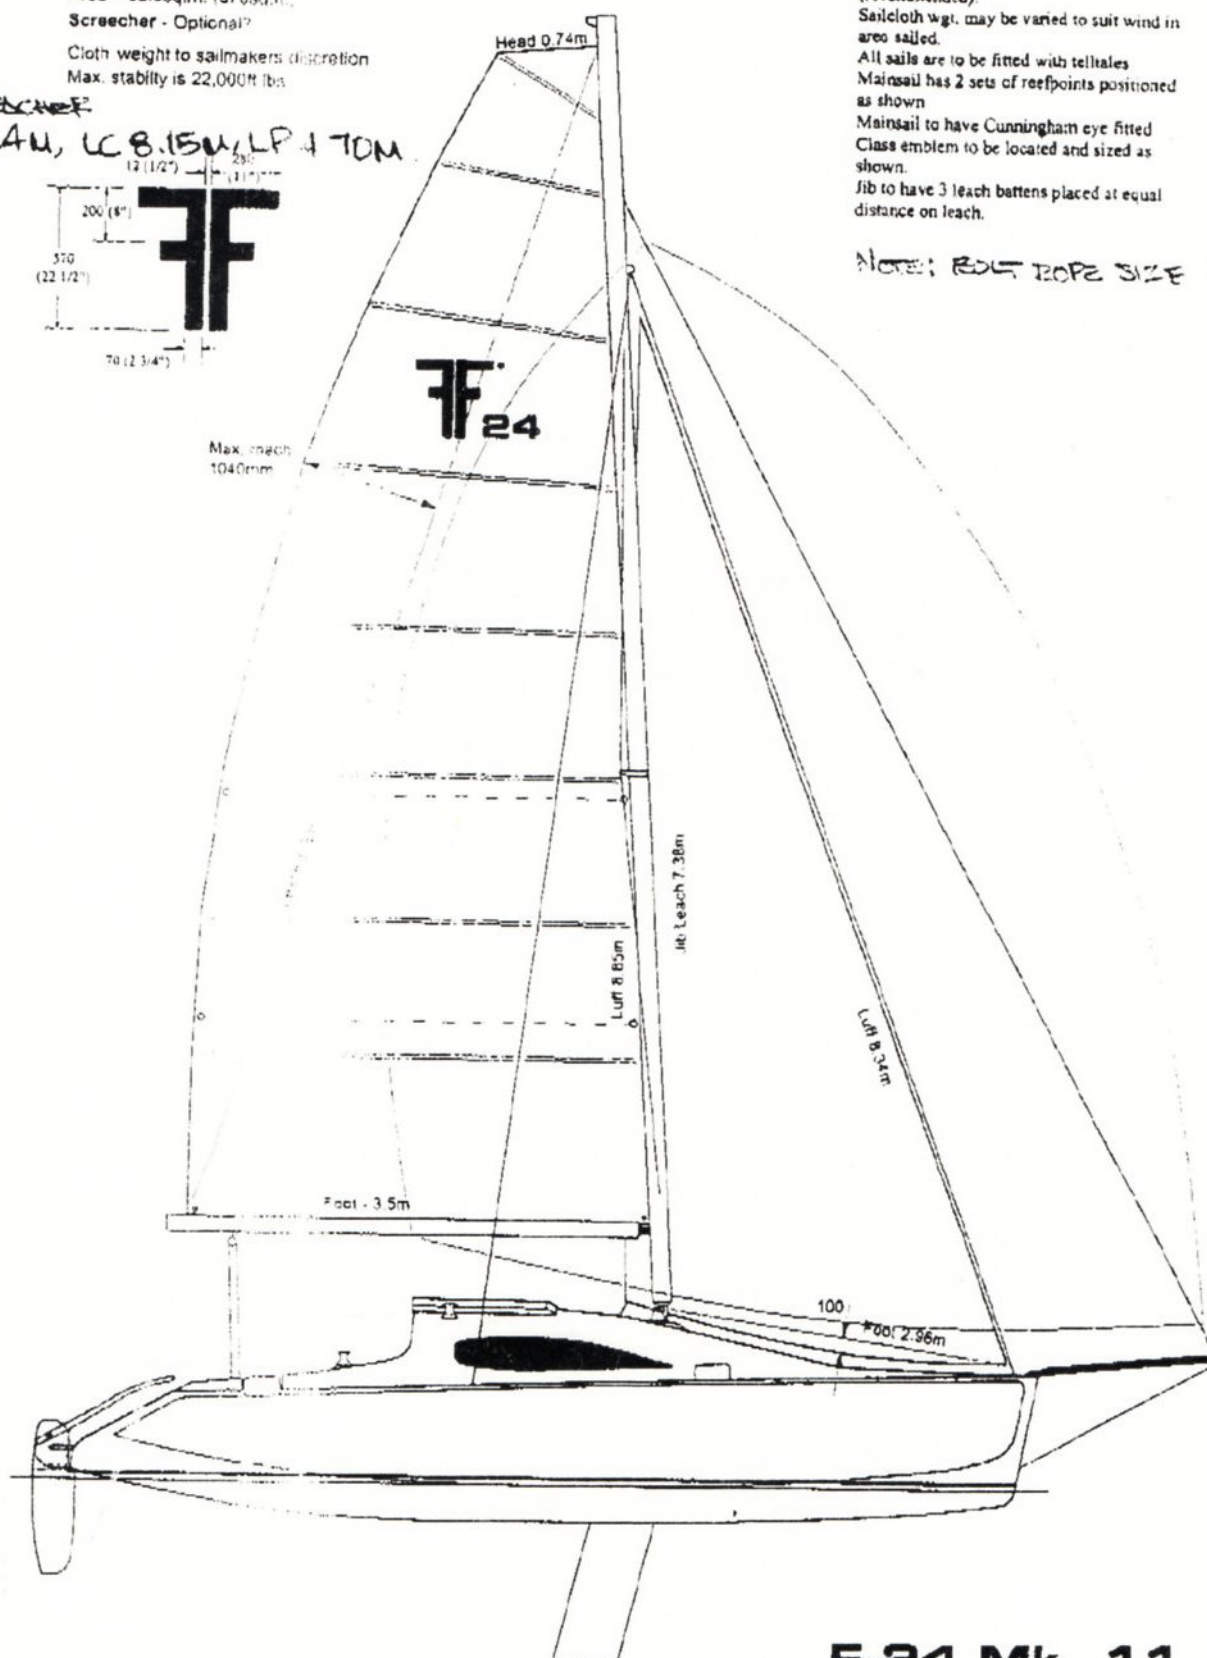

F-24 Mk. 11

SAIL PLAN